

RAISE YOUR GAME
HYVA PERFORMANCE



THE PERFECT SOLUTION
FOR APPLICATIONS
ON ALL VEHICLES





We Move your World

From light, compact machines, to solutions which deliver the ultimate levels of precision and lifting capacity, Hyva truck-mounted cranes are all built on the foundations of high performance, reliability, ease of use and safety. That's why they're among the most widely-used loader cranes in the world.

KENNIS ROLLOADER CRANES

Allowing the operator to cover a wide area with a limited number of extensions, Kennis cranes offer a number of significant advantages, including shorter loading and unloading times, high proximity to the load and high payloads. The crane can easily be removed from the trailer and installed on another. The roller cranes from Kennis (cranes by Hyva) are renowned for their reliability and durability.

Hyva: Your Trusted Partner.



Hyva Worldwide

Founded nearly forty years ago, Hyva is today one of the world's leading providers of innovative and highly efficient transport solutions for the commercial vehicle and environmental service industries. With over 25,000 customers and over 40% of the global hydraulic solutions market, the company operates in more than 130 countries, has 37 fully-owned subsidiaries, and a manufacturing base that includes production facilities in twelve countries, including Brazil, China, Germany, India and Italy. We are committed to the development, production, marketing and distribution of solutions for the movement and transportation of goods.

The growth and success of Hyva is built on two key aspects of its operation: the quality and innovative nature of the company's solutions, and the excellence of its customer support. The first of these, product quality, is illustrated by the fact that Hyva today offers the strongest front-end hydraulic





telescopic cylinder in the world, as well as a full range of double acting cylinders, fixed mounted and rolling truck cranes, container lifting systems (hookloaders and skiploaders) and waste collection units. They are solutions which are used worldwide across a range of sectors including transport, construction, mining, materials handling and environmental services providers.

Service quality, too, is a fundamental part of the Hyva business philosophy: with operations in more than 130 countries, the company operates one of the world's most extensive customer support networks in the industry. It is a network which has earned Hyva an international reputation for excellence in customer care.





Full range of applications with Hyva Cranes



Building



Construction



Oil&Gas



Mining



Rental



Logistic



Gardening



Power
station



Maintenance



Waste
handling

Raise your game with our complete line of cranes

HA

From 1 to 7 tm class
Compact telescopic cranes

Page 24 to page 35

HT

From 9 to 24 tm class
Telescopic cranes:
easy to use

Page 36 to page 43

HB

From 3 to 70 tm class
User-friendly articulated cranes

Page 44 to page 77

HB-R

From 133 to 166 tm class
Large, user-friendly articulated cranes

Page 78 to page 85

HC

From 9 to 165 tm class
Best in class articulated cranes

Page 86 to page 159

HV

From 3 to 22 tm class
Cost and Performance perfect solutions

Page 160 to page 169

MAN BASKET

From 5 to 7 tm class
Telescopic cranes with self-aligning basket

Page 170 to page 173

FFB

From 1 to 5 tm class
Specialized cranes for agricultural tractors

Page 174 to page 179

HZ

From 4 to 27 tm class
Specialized cranes for timber and recycling applications

Page 180 to page 201

KENNIS CRANES BY HYVA

From 13 to 40 tm class
Roller cranes

Page 202 to page 211



Environmental protection

As part of our corporate responsibility Hyva Crane is dedicated to protect the environment.

Painting filter

The air in and around the painting area is passed through a series of filters to remove the harmful chemicals from the air. Air quality is checked regularly to confirm correct operation of the system.

Heating system

Large spaces are more efficiently heated from below, rather than from above. In-floor heating is installed in most of our production area to make the most efficient use of energy.

ISO14001 Certification

Hyva Crane is a certified ISO 9001 and ISO 14001 company by Lloyd's Register Quality Assurance (LRQA): the world's leading provider of independent assessment services including certification, validation, verification and training across a broad spectrum of standards and schemes, with recognition from over 50 accreditation bodies.



Preserving the earth for future generations

ISO14001 certification achieved by the factory in Poviglio (Italy) allowed Hyva Crane to contribute to protect and preserve the environment in which we live.

In the last five years we have saved 212* tons of paper and preserved 3,180 trees. We have recycled 200* tons of wood. We saved 93,280,000* litres of drinking water. We recycled 58* tons of plastic saving 193* tons of oil.

In the last five years we saved 1,611,200* kwh and we recovered 183* tons of iron. We reduced CO2 emission in the air by 25%*.

* Certified source




From concept to field



Crane Design

Our research and development department uses the latest technology to design new products.

Each individual component of the crane is designed using a 3D CAD system which can test crane movements and ensure that it has a functional geometry.

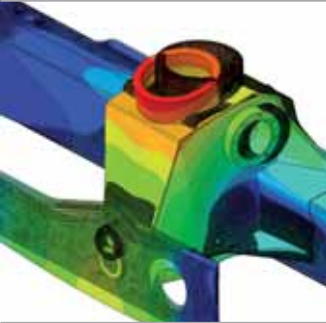

Structural verifications

During the design phase, FEM (Finite Element Method) is used to analyse the crane structure and loading conditions and obtain strength-to-weight optimisation.



Prototype development

Each component is checked for conformity to specification and assembled in a dedicated and specially equipped prototyping area.

And, every step is documented, with photographs, for precise tuning of the assembly process once it goes into production.



Tested in all conditions

Once assembled, every aspect of the prototype is fatigue tested. Every operating parameter is monitored by computer to detect any anomalies. Each prototype is subjected to up to 600,000 cycles of loading, to simulate 10 years of normal crane operations.




Field test

New cranes are delivered to expert users to be used in real, day-to-day operating conditions, including heavy duty applications. Direct communication between the user and R&D allows feedback for improvements. Cranes are launched only after a complete field testing programme.



Stability control systems (CE)

HS System

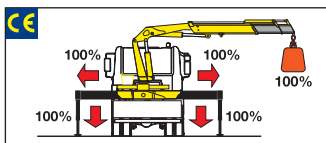


The **HS System** integrated in the load limiting device checks the stabilizers' positions. Only when all beams are fully open and all stabilizers are on the ground the crane can operate and lift loads.



Control display

HM System

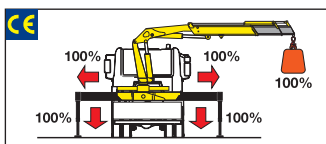


The **HM System** integrated in the load limiting device checks the stabilizers' positions. Only when all beams are fully open and all stabilizers are on the ground the crane can operate and lift loads.



Control display


HML System

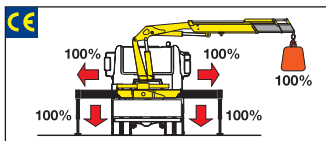

The **HML System** integrated in the load limiting device checks the stabilizers' positions. Only when all beams are fully open and all stabilizers are on the ground the crane can operate and lift loads.



HL System






The **HL system** checks the stabilizers' positions and the truck's inclination.

According to the beams' positions, the system allows two operating modes:

Mode A - all beams fully open and all stabilizers feet on the ground.

Mode B - stabilizers on the ground only.




In **mode A**: the load limiting device stops the crane when the crane reaches 100% of the nominal capacity.

In **mode B**: a dedicated sensor monitors the truck's inclination. The load limiting device stops the crane before it reaches an inclination angle dangerous for stability, or when the crane reaches its nominal capacity.




Control display

HXL System

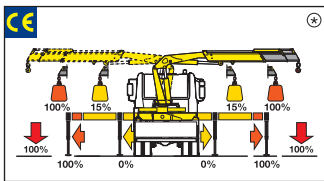

The **TCU** checks the positions of the stabilizers beams, monitoring for two possible positions: beam fully open, beam not fully open.


Depending on the position of the beams and the stabilizers, the crane's lifting capacity changes according to the setting made by the installer. This allows the operator to use the crane even with a beam partially or fully retracted without having stability problems.

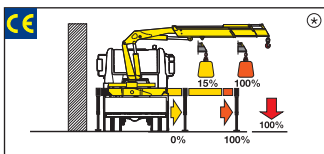

Optional **HRCS**

The Rotation Control Sensor constantly checks the slewing position of the crane and limits the lifting capacity depending on the beams' and the stabilizers positions.

H2XL System

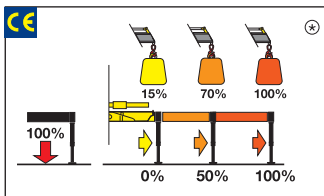

The **TCU** checks the positions of the stabilizers and divides the working area into 4 slewing sectors: over the cabin, right side, left side and the rear of the vehicle.

Depending on the position of the beams and the stabilizers, the crane's lifting capacity changes according to the settings made by the installer. This allows the operator to use the crane even with a beam partially or fully retracted without having stability problems.



The **HPES** (Proportional Encoder Sensor) recognizes 3 positions of the stabilizers' beams: fully open, half extended, fully closed.



The **HRCS** (Rotation Control Sensor) recognizes 4 slewing sectors: over the cabin, right side, left side, to the rear of the vehicle.

The **CAN-BUS** radio-control allows the operator to know the positions of the stabilizers and the loading conditions of the crane.

With manual opening stabilizers, the H2XL System only recognizes completely open or completely closed beam positions.



⊛ The percentages present in the pictures are merely examples and they have no bearing on the cranes' real lifting capacities. The cranes' real lifting capacities will depend on truck's stability.

Stability control systems (CE)

H3XL System




Display
3" graphic

H3XL

Beams
3 STEP

Slewing
PROPORTIONAL

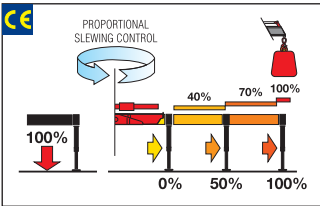

With a 3" TFT display and ergonomic keyboards, the operator can supervise the crane working and select the best parameters for effective use. The system controls the stability with 3-step beam outreach monitoring and continuous slewing control.

H4XL+TOP System




Display
7" graphic

Innovations
DLD -MT

H4XL

Beams
PROPORTIONAL

Slewing
PROPORTIONAL

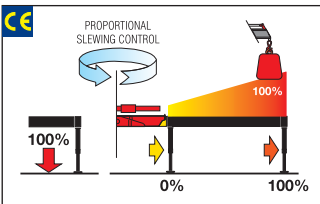

A 7" colour display with integrated keyboard gives the operator a higher level of awareness of the crane operation and allows selection of the best parameters for effective use. The system detects the exact position of the beams and proportionally calculates the stability.

Technical features

EES Extra Extension Speed


A special regenerative valve re-uses oil during extension, ensuring an incredibly high speed without compromising the safe operation of the crane.

Extensions speed comparison

Model	2S	3S	4S	5S
Standard	22"	32"	42"	51"
EES	10"	16"	22"	29"

SDS Smooth Descent System

This system compensates for boom oscillation, ensuring smooth movement of the load.

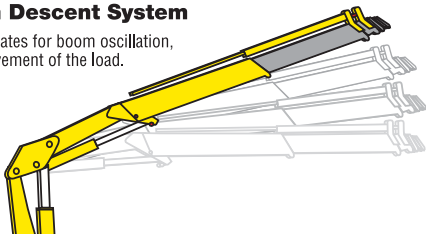

TCU Total Control Unit

TCU is a monitoring system designed by Hyva Crane to control all aspects of crane operation, including control of accessories. A display shows the user the state of the crane and easy on-board diagnostics allow the technician and dealer to inspect the activities of the crane.




LCS Lift Control System

Lift Control System increases the capacity of the crane up to 10% by reducing the speed when the crane is near its maximum lifting capacity.

P-LCS Proportional Lift Control System

The proportional system increase the capacity up to 15% by a proportional speed reduction when the crane is near to the maximum lifting capacity.

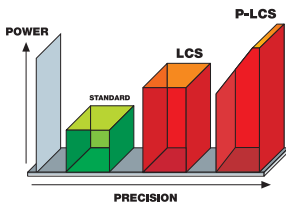

LAS Liftrod Articulating System

Thanks to the connecting rods the lifting capacity of the crane is constant in all boom positions.





MT

Magic Touch

EDGE
LINE
RAISE YOUR GAME

Focus on innovation

A graphic display which allows the driver, after truck stabilisation, to automatically fold (from any position to transport position) and unfold (to working position) when required. This easy-to-use function improves driver attention, promotes safe operation, saves time and can increase productivity.



EDGE LINE
RAISE YOUR GAME

DLD Dynamic Load Diagram

Focus on innovation

A new system which allows the driver to verify in advance the crane lifting capacity based on the truck stability. The operator can select the weight and, according to the stabiliser positions, the system calculates the stability all around the truck. A graphical display shows the outreach available for the load selected and the actual boom slewing position. This system, a first on truck-mounted articulated cranes, optimises stabilisation and makes crane operation safer and more efficient. Easy to use, saves time and improves safety through better crane stabilisation and avoidance of border line working conditions.

Radio Remote Controls

Single hand proportional system
The power in your hands



■ **Functionality**

Proportional speed control of any single movement

■ **Safety**

Stabilizer control by radio



Proportional speed control

■ **Comfort**

Single-handed control of every crane function

■ **Ergonomic**

Compact dimensions and reduced weight



Batteries type AA standard



Pressure compensated inlet section: BOSCH

Multifunction radio controls



A wide range of radio control can be chosen: Scanreco and Hetronic



Hetronic Not CE



Scanreco



CAN-Bus

Hetronic CE Basic

Operator can control the crane with high precision and fully supervise the loading and unloading operations.

- Multifunction remote control
- Protected against radio interference
- Move around the truck freely

EDGE LINE
RAISE YOUR GAME



Hetronic CE Graphic



4" TFT HD color display to keep the crane always under control



Pressure compensated control valve: HAWE PLS2



Pressure compensated control valve: SAUER DANFOSS PVG32



EDGE LINE RAISE YOUR GAME

NEW EDGE line cranes from Hyva, cutting edge innovation for 1st class lifting experience.

A new control station, incorporating both crane and stabiliser controls, has an ergonomic working position and user-friendly interface which delivers better operator efficiency and safety together with improved productivity.

Dynamic Load Diagram allows advance verification of the crane lifting capacity based on the truck stability, and, Magic Touch allows automatic folding and unfolding to transport and working positions.

There are several options for radio remote control and a wide range of stabiliser configurations to ensure safe positioning of the truck in all ground conditions.



The wide slewing angle, 425°, is best-in-class for medium sized cranes. And, with an extensive range of accessories and attachments, the cranes are suited to a wide range of applications.

Durability and lifetime value too is high with enhanced resistance to adverse environmental conditions as a result of a long life painting process, anti-corrosion treatments on non-painted components, protected rubber hose tracks and assembly of components using specialist tools.



HA

HA 10

HA 14

HA 15

HA 21

HA 22

HA 27

HA 28

HA 33

HA 50

HA 70

Line of telescopic cranes made to satisfy customers in need of a crane which is compact, light and easy to operate

HA 10



HA10 E1					
kg	875	490	320	235	
m	1,07	1,89	2,77	3,65	
HA10 E2					
kg	810	460	315	235	
m	1,13	1,95	2,77	3,65	



MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HA10 E1	0,94	3,01	328	16	3	180	145	17,5	5	595x1240x370
HA10 E2	-	3,85	328	16	3	180	164	17,5	5	647x1240x370

HA 14





Model	kg	995	675	450	320
HA14 E1	m	1,07	1,89	2,77	3,65
HA14 E2	m	1,13	1,95	2,77	3,65



For CE markets only

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HA14 E1	1,28	2,98	335	10	3	160	174	17,5	8	620x1241x430
HA14 E2	-	3,80	335	10	3	160	193	17,5	8	672x1241x430

HA 15



MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HA15 E1	1,28	2,98	335	10	3	160	174	17,5	8	620x1241x430
HA15 E2	-	3,80	335	10	3	160	193	17,5	8	672x1241x430

HA 21



Model	kg	kg	kg	kg	kg
HA21 E1	995	930	630	410	
m	1,23	2,15	3,16	4,12	
HA21 E2	995	880	620	410	
m	1,31	2,23	3,16	4,12	
HA21 E3	995	755	530	410	290
m	1,38	2,31	3,23	4,16	5,11




For CE markets only

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HA21 E1	2,00	3,56	335	10	3	160	216	17,5	8	695x1521x430
HA21 E2	-	4,51	335	10	3	160	240	17,5	8	710x1521x430
HA21 E3	-	5,15	335	10	3	150	262	17,5	8	868x1521x430


HA 22




HA22 E1



HA22 E2



HA22 E3



MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HA22 E1	2,00	3,56	335	10	3	160	216	17,5	8	695x1521x430
HA22 E2	-	4,51	335	10	3	160	240	17,5	8	710x1521x430
HA22 E3	-	5,45	335	10	3	150	262	17,5	8	868x1521x430

HA 27



Model	kg	995	995	830	610	
HA27 E1	m	1,32	2,25	3,24	4,24	
HA27 E2	m	1,39	2,32	3,24	4,24	
HA27 E3	m	1,46	2,39	3,31	4,24	5,19



For CE markets only

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HA27 E1	2,75	3,58	335	16	3	160	263	17,5	10	730x1587x440
HA27 E2	-	4,49	335	16	3	160	295	17,5	10	753x1587x440
HA27 E3	-	5,39	335	16	3	160	327	17,5	10	753x1587x440

HA 28



Model	kg	1220	830	610	
HA28 E1	2085	1220	830	610	
m	1,32	2,25	3,24	4,24	
HA28 E2	1960	1160	820	610	
m	1,39	2,32	3,24	4,24	
HA28 E3	1855	1105	780	605	465
m	1,46	2,39	3,31	4,24	5,19



MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HA28 E1	2,75	3,58	335	16	3	160	263	17,5	10	730x1587x440
HA28 E2	-	4,49	335	16	3	160	295	17,5	10	753x1587x440
HA28 E3	-	5,39	335	16	3	160	321	17,5	10	753x1587x440

HA 33



HA33 E1										
kg	3450*	2420	1390	940	690	530	405			
m	1,00	1,42	2,48	3,62	4,75	5,89	6,99			
HA33 E2										
kg	3430*	2285	1320	930	690	530	405			
m	1,00	1,50	2,56	3,62	4,75	5,89	6,99			
HA33 E3										
kg	3380*	2155	1255	875	675	530	405			
m	1,00	1,57	2,63	3,69	4,75	5,89	6,99			
HA33 E4										
kg	3350*	2030	1190	830	635	520	405			
m	1,00	1,65	2,71	3,77	4,83	5,89	6,99			




*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HA33 E1	3,45	3,94	395	16	3	175	301	17,5	10	976x1702x440
HA33 E2	-	4,98	395	16	3	175	337	17,5	10	1040x1702x440
HA33 E3	-	6,01	395	16	3	175	370	17,5	10	1040x1702x440
HA33 E4	-	7,04	395	16	3	175	399	17,5	10	1040x1702x440


HA 50




HA50 E2



HA50 E3



HA50 E4



*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HA50 E2	3,85	7,30	380	15	4	220	605	35	16	2085x1855x470
HA50 E3	-	8,80	380	15	4	220	650	35	16	2085x1855x470
HA50 E4	-	10,20	380	15	4	220	690	35	16	2085x1855x470

HA 70



HA70 E2

kg	6730*	3380	1885	1300	935	690
m	1,00	1,99	3,55	5,10	6,75	8,40



HA70 E3

kg	6620*	3225	1790	1230	935	690	470
m	1,00	2,05	3,62	5,20	6,75	8,40	10,00

HA70 E4

kg	6530*	3035	1700	1150	865	690	470
m	1,00	2,15	3,73	5,30	6,85	8,40	10,00

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HA70 E2	6,73	7,80	387	15	4	260	780	35	18	2310x1995x550
HA70 E3	-	9,30	387	15	4	260	840	35	18	2310x1995x550
HA70 E4	-	10,9	387	15	4	260	900	35	18	2310x1995x550



HT

HT 92
HT 112
HT 130
HT 162
HT 212
HT 240

Designed to be used in a car recovery and in all other applications where a compact, light and easy to operate crane is needed

HT 92

SDS

HT92 E2

kg	4060	2150	1445
m	2,16	4,07	5,98


HT92 E3

kg	3900	2040	1375	990
m	2,24	4,15	6,05	8,00




HT92 E4

kg	3700	1940	1290	945	735
m	2,31	4,22	6,13	8,08	10,03

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HT92 E2	8,77	9,2	425	20	4	300	1055	75	40	2315x2295x825
HT92 E3	-	11,1	425	20	4	300	1250	75	40	2315x2295x825
HT92 E4	-	13,1	425	20	4	300	1225	75	40	2315x2295x825

HT 112


SDS

HT112 E2

HT112 E3

HT112 E4


MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HT112 E2	10,2	10,2	425	20	4	300	1255	75	40	2304x2320x837
HT112 E3	-	10,1	425	20	4	300	1360	75	40	2304x2320x837
HT112 E4	-	10,1	425	20	4	300	1445	75	40	2304x2320x837

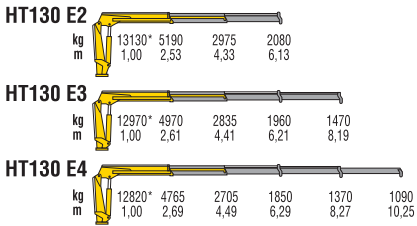HT 130

SDS



*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HT130 E2	13,1	9,80	425	20	4	285	1285	130	30	2300x2475x830
HT130 E3	-	11,8	425	20	4	285	1385	130	30	2300x2475x830
HT130 E4	-	13,8	425	20	4	285	1480	130	30	2300x2475x830

HT 162


HT162 E2

kg	16450*	6500	3740	2625
m	1,00	2,53	4,33	6,13


HT162 E3

kg	16270*	6235	3580	2490	1870
m	1,00	2,61	4,41	6,21	8,19


HT162 E4

kg	15980*	5940	3405	2345	1740	1390
m	1,00	2,69	4,49	6,29	8,27	10,25

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HT162 E2	16,5	9,8	425	20	4	290	1370	130	30	2300x2485x840
HT162 E3	-	11,8	425	20	4	290	1485	130	30	2300x2485x840
HT162 E4	-	13,8	425	20	4	290	1575	130	30	2300x2485x840

HT 212

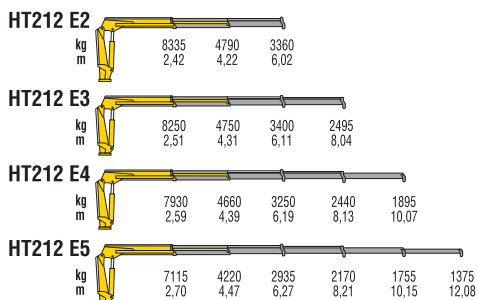SDS


MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HT212 E2	20,2	9,7	415	20	4	315	1945	130	80	2510x2400x870
HT212 E3	-	11,7	415	20	4	315	2090	130	80	2510x2400x870
HT212 E4	-	13,7	415	20	4	315	2210	130	80	2540x2400x870
HT212 E5	-	15,7	415	20	4	315	2305	130	80	2540x2400x870

HT 240


HT240 E2

kg	8480	4930	3500
m	2,42	4,22	6,02


HT240 E3

kg	8390	4890	3440	2630
m	2,51	4,31	6,11	8,04

HT240 E4

kg	8075	4705	3295	2490	2000
m	2,59	4,39	6,19	8,13	10,07

HT240 E5

kg	7250	4350	3020	2260	1820	1485
m	2,70	4,47	6,27	8,21	10,15	12,08

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	
HT240 E2	20,5	9,7	415	20	4	335	1945	130	80	2510x2400x870
HT240 E3	-	11,7	415	20	4	335	2090	130	80	2510x2400x870
HT240 E4	-	13,7	415	20	4	335	2210	130	80	2540x2400x870
HT240 E5	-	15,7	415	20	4	315	2305	130	80	2540x2400x870



HB

HB 31	HB 150
HB 40	HB 160
HB 50	HB 170
HB 60	HB 200
HB 70	HB 210
HB 80	HB 230
HB 90	HB 240
HB 100	HB 250
HB 112	HB 280
HB 120	HB 460
HB 130	HB 700

The most versatile and user-friendly crane, simple, efficient and robust

HB 31



HB31 E1

kg	2610*	820	575	420	310
m	1,00	3,18	4,53	5,98	7,43



HB31 E2

kg	2510*	765	530	405	310
m	1,00	3,28	4,63	5,98	7,43

HB31 E3

kg	2420*	715	490	370	300	220
m	1,00	3,38	4,73	6,03	7,38	8,78


*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB31 E1	2,61	6,98	370	10	4	175	390	25	8	1860x1590x490
HB31 E2	-	8,32	370	10	4	175	425	25	8	1920x1590x490
HB31 E3	-	9,66	370	10	4	175	455	25	8	2000x1590x490


HB 40




HB40 E1



HB40 E2



HB40 E3




*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB40 E1	4,06	7,75	370	15	3	215	515	30	16	1966x1780x500
HB40 E2	-	9,14	370	15	3	215	560	30	16	1966x1780x500
HB40 E3	-	10,51	370	15	3	215	600	30	16	2300x1780x620


HB 50




HB50 E1



HB50 E2



HB50 E3



*) Theoretical lifting capacity

**) Fixed hook capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB50 E1	4,73	7,75	370	15	3	250	515	30	16	1966x1780x500
HB50 E2	-	9,14	370	15	3	250	560	30	16	1966x1780x500
HB50 E3	-	10,51	370	15	3	250	600	30	16	2300x1780x620

HB 60



HB60 E1

kg	6580*	2680**	1740	1230	885	655
m	1,00	2,45	3,78	5,34	7,00	8,64



HB60 E2

kg	6410*	2615**	1650	1150	885	655	490
m	1,00	2,45	3,88	5,45	7,00	8,64	10,30

HB60 E3

kg	6160*	2515**	1555	1070	810	655	490	400
m	1,00	2,45	3,95	5,50	7,08	8,64	10,30	11,90

HB60 E4

kg	5970*	2435**	1475	995	745	590	495	400
m	1,00	2,45	4,05	5,60	7,20	8,73	10,30	11,90

*) Theoretical lifting capacity

**) Fixed hook capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB60 E1	6,58	8,34	387	15	4	245	800	35	20	2240x1980x600
HB60 E2	-	9,81	387	15	4	245	870	35	20	2240x1980x600
HB60 E3	-	11,34	387	15	4	245	930	35	20	2240x1980x600
HB60 E4	-	12,90	387	15	4	245	980	35	20	2250x1980x600

HB 70



HB70 E1

kg	7170*	2925**	1865	1300	945	705
m	1,00	2,45	3,84	5,40	7,02	8,66



HB70 E2

kg	6870*	2805**	1760	1230	945	705	530
m	1,00	2,45	3,90	5,46	7,02	8,66	10,30

HB70 E3

kg	6620*	2700**	1675	1155	870	705	530	415
m	1,00	2,45	3,95	5,50	7,10	8,66	10,30	11,90

HB70 E4

kg	6470*	2620**	1585	1075	800	635	530	415
m	1,00	2,45	4,08	5,60	7,20	8,76	10,30	11,90

*) Theoretical lifting capacity

**) Fixed hook capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB70 E1	7,17	8,50	387	15	4	265	820	35	20	2310x1980x600
HB70 E2	-	10,20	387	15	4	265	900	35	20	2310x1980x600
HB70 E3	-	11,70	387	15	4	265	960	35	20	2310x1980x600
HB70 E4	-	13,30	387	15	4	265	1020	35	20	2310x1980x600

HB 80



HB80 E1

kg	7890*	3220**	2050	1445	1050	790	
m	1,00	2,45	3,85	5,40	7,05	8,66	



HB80 E2

kg	7690*	3140**	1965	1370	1050	790	600
m	1,00	2,45	3,90	5,46	7,05	8,66	10,35

HB80 E3

kg	7420*	3030**	1865	1290	975	790	600	470
m	1,00	2,45	3,98	5,55	7,10	8,66	10,35	11,95

HB80 E4

kg	7190*	2935**	1760	1200	900	715	600	470
m	1,00	2,45	4,08	5,65	7,20	8,76	10,35	11,95

*) Theoretical lifting capacity
 **) Fixed hook capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB80 E1	7,89	8,50	387	15	4	285	850	35	20	2310x1980x600
HB80 E2	-	10,20	387	15	4	285	930	35	20	2310x1980x600
HB80 E3	-	11,70	387	15	4	285	990	35	20	2310x1980x600
HB80 E4	-	13,30	387	15	4	285	1050	35	20	2310x1980x600

HB 90

EES
SDS

HB90 E1

kg	10535*	2130	1510
m	1,00	4,08	5,76

HB90 E2

kg	9955*	2020	1415	1095	710	600
m	1,00	4,08	5,76	7,45	9,41	11,21

HB90 E3

kg	9185*	1920	1716	900	790	600	475
m	1,00	4,11	5,79	7,54	9,34	11,21	13,22

HB90 E4

kg	8775*	1850	1230	920	710	600	475
m	1,00	4,24	5,92	7,61	9,41	11,21	13,22

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC90 E1	8,7	9,1	425	20	4	310	1140	75	40	2305X2070X800
HC90 E2	-	10,7	425	20	4	310	1220	75	40	2305X2070X800
HC90 E3	-	12,6	425	20	4	310	1300	75	40	2305X2070X800
HC90 E4	-	14,4	425	20	4	310	1370	75	40	2305X2070X800

HB 100

EES



HB100 E1

kg	9570*	4400**	2335	1615
m	1,00	2,15	4,10	5,84



HB100 E2

kg	9140*	4195**	2230	1525	1140	815	595	435
m	1,00	2,15	4,10	5,84	7,64	9,60	11,70	13,80

HB100 E3

kg	8800*	4070**	2095	1390	1030	815	595	435
m	1,00	2,15	4,20	5,94	7,74	9,60	11,70	13,80

HB100 E4

kg	8470*	3925**	1970	1300	940	730	595	435
m	1,00	2,15	4,30	6,04	7,85	9,70	11,70	13,80

HB100 E5

kg	8150*	3785**	1860	1205	860	650	520	435
m	1,00	2,15	4,38	6,14	7,95	9,80	11,65	13,65

*) Theoretical lifting capacity

**) Fixed hook capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	
HB100 E1	9,57	9,45	395	17	4	290	1080	60	25	2480x2170x640
HB100 E2	-	11,30	395	17	4	290	1185	60	25	2480x2170x640
HB100 E3	-	13,20	395	17	4	290	1280	60	25	2480x2170x640
HB100 E4	-	15,30	395	17	4	290	1370	60	25	2480x2170x640
HB100 E5	-	17,30	395	17	4	290	1440	60	25	2480x2170x750

HB 112


HB112 E1

kg	10575*	2578	1820
m	1,00	4,10	5,79

HB112 E2

kg	10170*	2473	1716	1321	866	719
m	1,00	4,11	5,79	7,48	9,36	11,23

HB112 E3

kg	9570*	2281	1565	1184	946	719	575
m	1,00	4,19	5,87	7,56	9,36	11,23	13,27

HB112 E4

kg	9565*	2183	1481	1104	866	719	575
m	1,00	4,27	5,95	7,64	9,44	11,24	13,27

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC112 E1	10,5	9,3	425	20	4	300	1215	75	40	2310X2095X800
HC112 E2	-	10,9	425	20	4	300	1320	75	40	2310X2095X800
HC112 E3	-	12,6	425	20	4	300	1420	75	40	2310X2095X800
HC112 E4	-	14,6	425	20	4	300	1510	75	40	2310X2095X800

HB 120

EES



HB120 E1

kg	11830*	4825**	2790	1940
m	1,00	2,45	4,24	6,04



HB120 E2

kg	11250*	4560**	2605	1825	1375	1005	735	545
m	1,00	2,45	4,32	6,13	8,00	10,06	12,13	14,32

HB120 E3

kg	10960*	4415**	2485	1725	1275	1005	735	545	300
m	1,00	2,45	4,41	6,21	8,08	10,06	12,13	14,32	16,43

HB120 E4

kg	10670*	4295**	2370	1605	1170	895	735	545	300
m	1,00	2,45	4,50	6,30	8,17	10,15	12,13	14,32	16,44

HB120 E5

kg	10510*	4230**	2295	1555	1120	840	670	545	300
m	1,00	2,45	4,58	6,38	8,25	10,23	12,21	14,21	16,44

HB120 E3J2






kg						450	395	350	280
m						12,75	14,12	15,60	17,20

*) Theoretical lifting capacity
**) Fixed hook capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB120 E1	11,8	9,6	380	17	4	310	1285	100	25	2460x2340x885
HB120 E2	-	11,5	380	17	4	310	1415	100	25	2460x2340x885
HB120 E3	-	13,5	380	17	4	310	1535	100	25	2470x2340x885
HB120 E4	-	15,5	380	17	4	310	1635	100	25	2485x2340x885
HB120 E5	-	17,6	380	17	4	310	1705	100	25	2500x2340x940
HB120 E3J2	-	18,8	380	17	4	290	1835	100	25	2490x2340x1030

HB 130

EES
SDS

HB130 E1

HB130 E2

HB130 E3

HB130 E4

HB130 E5


*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB130 E1	12,4	9,9	425	20	4	285	1335	130	30	2480x2295x825
HB130 E2	-	11,7	425	20	4	285	1445	130	30	2480x2295x825
HB130 E3	-	13,7	425	20	4	285	1570	130	30	2480x2295x825
HB130 E4	-	15,7	425	20	4	285	1660	130	30	2480x2295x825
HB130 E5	-	17,8	425	20	4	285	1745	130	30	2480x2295x895

HB 150



HB150 E1

kg	13890*	5660**	3275	2275
m	1,00	2,45	4,24	6,04



HB150 E2

kg	13240*	5405**	3065	2130	1620	1190	885	610
m	1,00	2,45	4,32	6,13	8,00	10,06	12,13	14,32

HB150 E3

kg	12880*	5200**	2920	2010	1495	1190	885	610	380
m	1,00	2,45	4,41	6,21	8,08	10,06	12,13	14,32	16,43

HB150 E4

kg	12690*	5100**	2820	1895	1385	1075	885	610	380
m	1,00	2,45	4,50	6,30	8,17	10,15	12,13	14,32	16,44

HB150 E5

kg	12390*	5000**	2705	1805	1295	995	805	615	380
m	1,00	2,45	4,58	6,38	8,25	10,23	12,21	14,21	16,44

HB150 E3J2

kg								550	485	430	360
m								12,75	14,12	15,60	17,20

*) Theoretical lifting capacity
**) Fixed hook capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB150 E1	13,9	9,6	380	17	4	290	1470	100	25	2460x2340x885
HB150 E2	-	11,5	380	17	4	290	1600	100	25	2460x2340x885
HB150 E3	-	13,5	380	17	4	290	1720	100	25	2470x2340x885
HB150 E4	-	15,5	380	17	4	290	1820	100	25	2485x2340x885
HB150 E5	-	17,6	380	17	4	290	1900	100	25	2500x2340x940
HB150 E3J2	-	18,8	380	17	4	270	2030	100	25	2490x2340x1030

HB 160

EES
SDS



HB160 E1

kg	15840*	3490	2475
m	1,00	4,54	6,34



HB160 E2

kg	15030*	3310	2305	1775	1305	980	740
m	1,00	4,54	6,34	8,14	10,36	12,34	14,39

HB160 E3

kg	14550*	3150	2170	1645	1305	980	740	535
m	1,00	4,62	6,42	8,22	10,2	12,34	14,39	16,49

HB160 E4

kg	14150*	3005	2040	1520	1185	980	740	535
m	1,00	4,71	6,51	8,31	10,29	12,27	14,39	16,49

HB160 E5

kg	13740*	2875	1925	1410	1080	875	740	535
m	1,00	4,78	6,58	8,38	10,36	12,34	14,39	16,49

*) Theoretical lifting capacity

HB 160



EES Extra Extension Speed
SDS Smooth Descent System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB160 E1	15,8	9,9	425	20	4	280	1525	130	40	2490x2295x825
HB160 E2	-	11,7	425	20	4	280	1660	130	40	2490x2295x825
HB160 E3	-	13,7	425	20	4	280	1775	130	40	2490x2295x825
HB160 E4	-	15,7	425	20	4	280	1880	130	40	2490x2295x825
HB160 E5	-	17,8	425	20	4	280	1970	130	40	2490x2295x905

HB 170

EES
SDS



HB170 E1

kg	15760*	7470**	3700	2560
m	1,00	2,10	4,26	6,13

HB170 E2

kg	15340*	7215**	3600	2445	1850
m	1,00	2,10	4,26	6,13	8,00

HB170 E3

kg	15040*	7040**	3530	2355	1750	1380	1045	795	600
m	1,00	2,10	4,26	6,13	8,00	9,95	11,90	14,00	16,10

HB170 E4

kg	14680*	6900**	3445	2255	1640	1270	1045	795	600	460
m	1,00	2,10	4,26	6,13	8,00	9,95	11,90	14,00	16,10	18,30

HB170 E5

kg	14360*	6740**	3300	2130	1525	1170	940	795	600	460
m	1,00	2,10	4,35	6,22	8,10	10,05	12,00	14,00	16,10	18,30

HB170 E6

kg	14010*	6580**	3170	2030	1435	1070	850	700	600	460
m	1,00	2,10	4,42	6,30	8,16	10,10	12,10	14,10	16,10	18,30

HB170 E4J2

kg										535	480	435	360
m										14,60	16,00	17,50	19,10

*) Theoretical lifting capacity

**) Fixed hook capacity

HB 170



EES Extra Extension Speed
SDS Smooth Descent System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB170 E1	15,8	9,9	387	17	4	310	1770	130	32	2480x2295x970
HB170 E2	-	11,8	387	17	4	310	1910	130	32	2480x2295x970
HB170 E3	-	13,8	387	17	4	310	2030	130	32	2480x2295x1000
HB170 E4	-	15,7	387	17	4	310	2150	130	32	2480x2295x1000
HB170 E5	-	17,8	387	17	4	310	2260	130	32	2480x2295x1000
HB170 E6	-	19,8	387	17	4	310	2340	130	32	2495x2295x1000
HB170 E4J2	-	21,2	387	17	4	310	2460	130	32	2480x2295x1120

HB 200

EES

SDS



HB200 E1

kg	19620*	9210**	4605	3200
m	1,00	2,10	4,26	6,13



HB200 E2

kg	19170*	9060**	4500	3095	2325
m	1,00	2,10	4,26	6,13	8,00

HB200 E3

kg	18660*	8750**	4380	2945	2205	1740	1325	1005	770
m	1,00	2,10	4,26	6,13	8,00	9,95	11,90	14,00	16,10

HB200 E4

kg	18210*	8575**	4275	2845	2085	1605	1325	1005	770	550
m	1,00	2,10	4,26	6,13	8,00	9,95	11,90	14,00	16,10	18,30

HB200 E5

kg	17790*	8370**	4090	2680	1940	1490	1195	1005	770	550
m	1,00	2,10	4,35	6,22	8,10	10,05	12,00	14,00	16,10	18,30

HB200 E6

kg	17390*	8190**	3935	2570	1840	1395	1105	915	775	550
m	1,00	2,10	4,42	6,30	8,16	10,10	12,10	14,10	16,10	18,30

HB200 E5J2

kg									550	500	450	380
m									16,70	18,10	19,60	21,10

*) Theoretical lifting capacity
 **) Fixed hook capacity

HB 200



EES Extra Extension Speed SDS Smooth Descent System


MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB200 E1	19,6	9,9	387	17	4	300	1860	130	40	2480x2295x970
HB200 E2	-	11,8	387	17	4	300	2010	130	40	2480x2295x970
HB200 E3	-	13,8	387	17	4	300	2150	130	40	2480x2295x1000
HB200 E4	-	15,7	387	17	4	300	2280	130	40	2480x2295x1000
HB200 E5	-	17,8	387	17	4	300	2380	130	40	2480x2295x1000
HB200 E6	-	19,8	387	17	4	300	2480	130	40	2495x2295x1000
HB200 E5J2	-	23,3	387	17	4	300	2715	130	40	2480x2300x1120

HB 210


EES
SDS




HB210 E2




HB210 E3



HB210 E4



HB210 E5



*) Theoretical lifting capacity

HB 210



EES Extra Extension Speed
SDS Smooth Descent System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC210 E1	18,9	11,9	415	20	4	415	2715	130	80	2500X2300X930
HC210 E2	-	13,9	415	20	4	415	2600	130	80	2500X2300X930
HC210 E3	-	16,0	415	20	4	415	2455	130	80	2500X2300X930
HC210 E4	-	18,2	415	20	4	415	2305	130	80	2500X2300X930

HB 230

EES

SDS

LCS



HB230 E1

kg	20660*	9620**	4765	3370
m	1,00	2,10	4,26	6,13



HB230 E2

kg	19980*	9415**	4665	3260	2490
m	1,00	2,10	4,26	6,13	8,00

HB230 E3

kg	19300*	9140**	4530	3095	2355	1905	1470	1145	905
m	1,00	2,10	4,26	6,13	8,00	9,95	11,90	14,00	16,10

HB230 E4

kg	18870*	8935**	4430	2995	2225	1755	1470	1145	905	650
m	1,00	2,10	4,26	6,13	8,00	9,95	11,90	14,00	16,10	18,30

HB230 E5

kg	18420*	8720**	4235	2820	2075	1635	1330	1145	905	650
m	1,00	2,10	4,35	6,22	8,10	10,05	12,00	14,00	16,10	18,30

HB230 E6

kg	18030*	8525**	4080	2700	1970	1535	1230	1045	905	650
m	1,00	2,10	4,42	6,30	8,16	10,10	12,10	14,10	16,10	18,30

HB230 E5J2

kg									605	550	505	400
m									16,70	18,10	19,60	21,10

*) Theoretical lifting capacity
 **) Fixed hook capacity

HB 230



EES Extra Extension Speed
SDS Smooth Descent System
LCS Lift Control System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB230 E1	20,7	9,9	387	17	4	315	1890	130	40	2480x2295x970
HB230 E2	-	11,8	387	17	4	315	2040	130	40	2480x2295x970
HB230 E3	-	13,8	387	17	4	315	2180	130	40	2480x2295x1000
HB230 E4	-	15,7	387	17	4	315	2310	130	40	2480x2295x1000
HB230 E5	-	17,8	387	17	4	315	2410	130	40	2480x2295x1000
HB230 E6	-	19,8	387	17	4	315	2510	130	40	2495x2295x1000
HB230 E5J2	-	23,3	387	17	4	315	2745	130	40	2480x2300x1120

HB 240

EES
SDS



HB240 E2

kg	22700*	5280	3610	2750
m	1,00	4,30	6,20	8,10

HB240 E3

kg	21865*	5085	3425	2570	2035	1530	1170	770
m	1,00	4,30	6,20	8,10	10,13	12,25	14,46	16,59

HB240 E4

kg	21155*	4820	3215	2380	1880	1530	1170	915	735
m	1,00	4,39	6,29	8,19	10,22	12,25	14,46	16,59	18,70

HB240 E5

kg	21490*	4585	3033	2220	1710	1390	1170	915	735
m	1,00	4,47	6,37	8,27	10,30	12,33	14,46	16,59	18,70

*) Theoretical lifting capacity

HB 240



EES Extra Extension Speed
SDS Smooth Descent System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB240 E1	18,9	11,9	415	20	4	320	2375	130	80	2500X2300X930
HB240 E2	-	13,9	415	20	4	320	2530	130	80	2500X2300X930
HB240 E3	-	16,0	415	20	4	320	2680	130	80	2500X2300X930
HB240 E4	-	18,2	415	20	4	320	2800	130	80	2500X2300X930

HB 250



HB250 E1

kg	25070*	9580**	5830	4065	2895	2160	1620	1255
m	1,00	2,55	4,30	6,07	7,93	9,82	11,82	13,90



HB250 E2

kg	24670*	9480**	5725	3890	2895	2160	1620	1255
m	1,00	2,55	4,31	6,08	7,93	9,82	11,81	13,87

HB250 E3

kg	24030*	9275**	5575	3740	2750	2160	1620	1255	1005
m	1,00	2,55	4,31	6,08	7,93	9,83	11,82	13,88	15,95

HB250 E4

kg	23390*	9070**	5315	3535	2570	1985	1620	1255	1005	850
m	1,00	2,55	4,40	6,17	8,02	9,92	11,82	13,88	15,95	17,75

HB250 E5

kg	22890*	8970**	5110	3390	2425	1865	1500	1255	1005	850
m	1,00	2,55	4,48	6,25	8,10	10,00	11,90	13,88	15,95	17,75

HB250 E6

kg	22860*	8950**	5035	3320	2375	1805	1445	1205	965	780
m	1,00	2,55	4,54	6,31	8,16	10,06	11,96	13,94	15,92	17,81

HB250 E3J3

kg						1105	925	805	700	500
m						12,30	13,90	15,50	17,20	19,00

HB250 E4J3

kg							835	745	630	565	480
m							14,30	15,80	17,50	19,10	20,90

*) Theoretical lifting capacity

***) Fixed hook capacity

HB 250



MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB250 E1	25,1	9,8	400	20	4	290	2580	160	50	2500x2320x1115
HB250 E2	-	11,6	400	20	4	290	2760	160	50	2500x2320x1115
HB250 E3	-	13,4	400	20	4	290	2900	160	50	2500x2320x1115
HB250 E4	-	15,3	400	20	4	290	3060	160	50	2500x2320x1115
HB250 E5	-	17,3	400	20	4	290	3200	160	50	2500x2320x1115
HB250 E6	-	19,3	400	20	4	290	3295	160	50	2540x2320x1200
HB250 E3J3	-	20,2	400	25	4	290	3450	160	50	2500x2430x1300
HB250 E4J3	-	22,1	400	25	4	295	3600	160	50	2500x2445x1300

HB 280

LCS



HB280 E1

kg	25820*	9785**	6005	4245	3055	2300	1750	1375
m	1,00	2,55	4,30	6,07	7,93	9,82	11,82	13,90

HB280 E2

kg	25430*	9685**	5900	4065	3055	2300	1750	1375
m	1,00	2,55	4,31	6,08	7,93	9,82	11,81	13,87

HB280 E3

kg	24780*	9530**	5750	3900	2905	2300	1750	1375	1115
m	1,00	2,55	4,31	6,08	7,93	9,83	11,82	13,88	15,95

HB280 E4

kg	24070*	9325**	5470	3685	2710	2120	1750	1375	1115	955
m	1,00	2,55	4,40	6,17	8,02	9,92	11,82	13,88	15,95	17,75

HB280 E5

kg	23650*	9175**	5275	3545	2570	1995	1620	1365	1115	955
m	1,00	2,55	4,48	6,25	8,10	10,00	11,90	13,88	15,95	17,75

HB280 E6

kg	23650*	9125**	5210	3470	2510	1925	1560	1315	1065	870
m	1,00	2,55	4,54	6,31	8,16	10,06	11,96	13,94	15,92	17,81

HB280 E3J3

kg							1205	1005	885	780	555
m							12,30	13,90	15,50	17,20	19,00

HB280 E4J3

kg								935	830	700	630	530
m								14,30	15,80	17,50	19,10	20,90

*) Theoretical lifting capacity
 **) Fixed hook capacity

HB 280



LCS Lift Control System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB280 E1	25,8	9,8	400	20	4	305	2630	160	50	2500x2320x1115
HB280 E2	-	11,6	400	20	4	305	2810	160	50	2500x2320x1115
HB280 E3	-	13,4	400	20	4	305	2950	160	50	2500x2320x1115
HB280 E4	-	15,3	400	20	4	305	3110	160	50	2500x2320x1115
HB280 E5	-	17,3	400	20	4	305	3250	160	50	2500x2320x1115
HB280 E6	-	19,3	400	20	4	305	3345	160	50	2540x2320x1200
HB280 E3J3	-	20,2	400	25	4	295	3500	160	50	2500x2430x1300
HB280 E4J3	-	22,1	400	25	4	295	3650	160	50	2500x2445x1300

HB 460

EES
SDS
LAS



HB460 E2

	43420*	22150*	10485	7360	5590
kg					
m	1,00	1,95	4,12	5,90	7,75

HB460 E3

	42350*	21720*	10010	7025	5310	4220	3270	2565	2040
kg									
m	1,00	1,95	4,23	6,00	7,85	9,80	11,80	13,90	16,00

HB460 E4

	41780*	21425*	9600	6710	5020	3955	3270	2565	2040	1605
kg										
m	1,00	1,95	4,35	6,10	7,95	9,90	11,80	13,90	16,00	18,20

HB460 E5

	41400*	21230*	9410	6505	4795	3720	3040	2565	2040	1605	1260
kg											
m	1,00	1,95	4,35	6,10	7,95	9,90	11,80	13,90	16,00	18,20	20,40

HB460 E6

	40050*	20540*	9095	6245	4580	3515	2845	2360	2040	1605	1260	1005
kg												
m	1,00	1,95	4,40	6,15	8,00	9,90	11,90	13,90	16,00	18,20	20,40	22,60


HB460 E7

	39230*	20120*	8915	6050	4385	3325	2640	2170	1840	1605	1260	1005
kg												
m	1,00	1,95	4,40	6,15	8,00	9,90	11,90	13,90	16,00	18,20	20,40	22,60

HB460 E8

	38550*	19770*	8560	5800	4180	3140	2460	1975	1660	1425	1260	1005
kg												
m	1,00	1,95	4,50	6,20	8,10	10,00	12,00	14,00	16,10	18,20	20,40	22,60

*) Theoretical lifting capacity

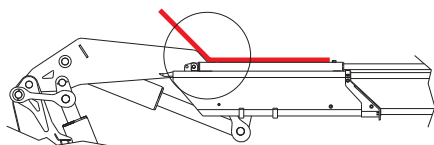

Second boom with negative angle in order to simplify operations in difficult access conditions

HB 460



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

For non - CE markets only

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB460 E2	43,4	12,1	400	22	4	305	4040	210	50	2505x2460x1275
HB460 E3	-	14,1	400	22	4	305	4290	210	50	2505x2460x1275
HB460 E4	-	16,1	400	22	4	305	4570	210	50	2505x2460x1275
HB460 E5	-	18,2	400	22	4	305	4810	210	50	2505x2460x1285
HB460 E6	-	20,3	400	22	4	305	5010	210	50	2505x2460x1285
HB460 E7	-	22,5	400	22	4	305	5200	210	50	2505x2460x1400
HB460 E8	-	24,7	400	22	4	305	5380	210	50	2510x2480x1400

HB 700

EES

SDS

LAS



HB700 E2

kg	23280*	16890	12050	9250
m	3,00	4,05	5,75	7,55

HB700 E4

kg	22100*	16090	11330	8570	6800	5640
m	3,00	4,12	5,85	7,65	9,55	11,45

HB700 E6

kg	21450*	15070	10540	7840	6120	5030	4210	3640	2730	2420	1770
m	3,00	4,27	6,00	7,77	9,70	11,60	13,60	15,60	17,60	19,60	22,00


HB700 E8

kg	20850*	14650	10120	7400	5660	4520	3710	3130	2730	2420	1770	1610	1265
m	3,00	4,27	6,00	7,77	9,70	11,60	13,60	15,60	17,60	19,60	22,00	24,15	26,50

HB700 E10

kg	20660*	13620	9390	6840	5160	4060	3260	2710	2320	2020	1770	1610	1265
m	3,00	4,55	6,25	8,05	10,00	11,85	13,85	15,85	17,85	19,85	22,00	24,15	26,50

*) Theoretical lifting capacity

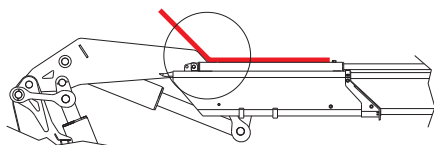

Second boom with negative angle in order to simplify operations in difficult access conditions

HB 700



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

For non - CE markets only

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB700 E2	69,8	12,1	420	45	4	280	6350	280	80	2530x2450x1950
HB700 E4	-	16,0	420	45	4	280	7000	280	80	2530x2450x1950
HB700 E6	-	20,2	420	45	4	280	7600	280	80	2530x2450x2110
HB700 E8	-	24,1	420	45	4	280	8150	280	80	2530x2505x2135
HB700 E10	-	28,7	420	45	4	280	8550	280	80	2530x2635x2135



HB-R

HB 330R

HB 350R

HB 430R

HB 450R

HB 600R

HB 660R

Large, user-friendly articulated cranes

HB 330R



HB330R E2

kg	15900*	7880**	7450	5390	4140	3130	2450	1900
m	2,00	4,03	4,28	5,88	7,63	9,58	11,53	13,53



HB330R E3

kg	15700*	7710**	7150	5140	3920	3130	2450	1900	1400
m	2,00	4,03	4,38	5,98	7,73	9,58	11,53	13,53	15,53

HB330R E4

kg	15500*	7550**	6900	4920	3720	2950	2450	1900	1400	1080
m	2,00	4,03	4,45	6,08	7,83	9,68	11,53	13,53	15,53	17,53

*) Theoretical lifting capacity

**) Fixed hook capacity

For non - CE markets only

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB330R E2	31,8	11,6	380	20	4	290	3145	160	50	2550x2490x1175
HB330R E3	-	13,5	380	20	4	290	3370	160	50	2550x2490x1175
HB330R E4	-	15,4	380	20	4	290	3580	160	50	2550x2490x1175

HB 350R



HB350R E2

kg	16400*	8100**	7680	5580	4300	3270	2560	2010
m	2,00	4,03	4,28	5,88	7,63	9,58	11,53	13,53



HB350R E3

kg	16100*	7930**	7350	5300	4070	3270	2560	2010	1495
m	2,00	4,03	4,38	5,98	7,73	9,58	11,53	13,53	15,53

HB350R E4

kg	15800*	7790**	7100	5060	3850	3060	2560	2010	1495	1160
m	2,00	4,03	4,45	6,08	7,83	9,68	11,53	13,53	15,53	17,53

*) Theoretical lifting capacity

**) Fixed hook capacity


For non - CE markets only

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB350R E2	32,8	11,6	380	20	4	300	3165	160	50	2550x2490x1175
HB350R E3	-	13,5	380	20	4	300	3390	160	50	2550x2490x1175
HB350R E4	-	15,4	380	20	4	300	3600	160	50	2550x2490x1175


HB 430R




HB430R E2



HB430R E3



HB430R E4



*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB430R E2	43,6	11,64	385	20	4	250	3835	250	50	2550x2495x1280
HB430R E3	-	13,55	385	20	4	250	4075	250	50	2550x2495x1280
HB430R E4	-	15,46	385	20	4	250	4280	250	50	2550x2495x1280

HB 450R



HB450R E2

kg	22740*	10700	7750	5950	4480	3550	2500
m	2,00	4,25	5,85	7,6	9,55	11,5	13,5



HB450R E3

kg	22400*	10300	7400	5600	4480	3550	2500	1800
m	2,00	4,35	5,95	7,7	9,55	11,5	13,5	15,5

HB450R E4

kg	22320*	10030	7200	5400	4270	3550	2500	1800	1250
m	2,00	4,45	6,05	7,8	9,65	11,5	13,5	15,5	17,5

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB450R E2	45,5	11,64	385	20	4	270	3885	250	50	2550x2495x1280
HB450R E3	-	13,55	385	20	4	270	4125	250	50	2550x2495x1280
HB450R E4	-	15,46	385	20	4	270	4330	250	50	2550x2495x1280

HB 600R



HB600R E4

kg	28700*	12900	9000	6780	5360	4470	3300	2850	2200
m	2,00	4,45	6,3	8,15	10,15	12,15	14,3	16,4	18,6



HB600R E6

kg	27500*	12200	8340	6200	4820	3940	3300	2850	2200	1680
m	2,00	4,5	6,35	8,2	10,2	12,2	14,3	16,4	18,6	20,9


*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB600R E4	57,4	16,3	420	18	4	290	5100	250	70	2550x2420x1465
HB600R E6	-	20,5	420	18	4	290	5600	250	70	2550x2420x1465


HB 660R



HB660R E4



HB660R E6



*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HB660R E4	58,8	16,3	420	18	4	300	5150	250	70	2550x2420x1465
HB660R E6	-	20,5	420	18	4	300	5650	250	70	2550x2420x1465



HC

HC 91	HC 223
HC 91K	HC 231 
HC 95	HC 235e 
HC 103 	HC 243
HC 111	HC 243K
HC 111K	HC 245
HC 121	HC 261 
HC 125 	HC 265e 
HC 131	HC 291
HC 131K	HC 331
HC 143	HC 361
HC 153 	HC 501 
HC 161	HC 601e 
HC 161K	HC 661e 
HC 173	HC 801 
HC 183 	HC 951
HC 213	HC 1151
HC 213K	HC 1651

Best in class articulated cranes.
 For heavy users who require ultimate precision and lifting capacity.
 Packed with innovation, the HC line offers a wide range of accessories besides the already standard incorporated features

HC 91



HC91 E1

kg	8340*	2000	1400
m	1,00	4,17	5,98

HC91 E2

kg	3900*	935	1330	1015	720	515
m	1,00	4,17	5,98	7,79	9,82	11,85

HC91 E3

kg	7630*	1795	1210	910	720	515	355
m	1,00	4,25	6,06	7,87	9,82	11,85	14,00

HC91 E4

kg	7380*	1705	1130	830	640	515	355	280
m	1,00	4,33	6,14	7,95	9,90	11,85	14,00	16,18

HC91 E5

kg	7040*	1600	1040	710	535	430	355	280
m	1,00	4,40	6,21	8,02	9,97	11,92	14,00	16,18

*) Theoretical lifting capacity

HC 91



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC91 E1	8,4	9,3	425	20	4	315	1215	75	40	2290X2085X800
HC91 E2	-	10,9	425	20	4	315	1305	75	40	2290X2085X800
HC91 E3	-	13,1	425	20	4	315	1395	75	40	2300X2085X800
HC91 E4	-	15,1	425	20	4	315	1480	75	40	2300X2085X800
HC91 E5	-	17,3	425	20	4	315	1555	75	40	2300X2085X845

HC 91 K

EES
SDS
LAS



HC91K E2

kg	8290*	2390	1700	1210
m	1,00	3,47	4,91	6,72



HC91K E3

kg	8040*	2265	1555	1115	850
m	1,00	3,55	5,00	6,30	8,75

*) Theoretical lifting capacity

HC 91 K



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC91K E2	8,3	10,1	425	20	4	315	1280	75	40	2285x2085x885
HC91K E3	-	12,2	425	20	4	315	1370	75	40	2285x2085x885

HC 95

- EES**
- SDS**
- LCS**
- LAS**



HC95 E1

kg	8860*	2125	1490
m	1,00	4,17	5,98

HC95 E2

kg	8570*	2055	1415	1080	765	565
m	1,00	4,17	5,98	7,79	9,82	11,85

HC95 E3

kg	8330*	1960	1320	990	785	580	400
m	1,00	4,25	6,06	7,87	9,82	11,85	14,00

HC95 E4

kg	8010*	1850	1220	895	690	560	400	335
m	1,00	4,33	6,14	7,95	9,90	11,85	14,00	16,18

HC95 E5

kg	7480*	1700	1100	790	595	475	395	310
m	1,00	4,40	6,21	8,02	9,97	11,92	14,00	16,18

*) Theoretical lifting capacity

HC 95



- EES** Extra Extension Speed
- SDS** Smooth Descent System
- LCS** Lift Control System
- LAS** Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC95 E1	8,9	9,3	425	20	4	335	1215	75	40	2290X2085X800
HC95 E2	-	10,9	425	20	4	335	1305	75	40	2290X2085X800
HC95 E3	-	13,1	425	20	4	335	1395	75	40	2300X2085X800
HC95 E4	-	15,1	425	20	4	330	1480	75	40	2300X2085X800
HC95 E5	-	17,3	425	20	4	327	1555	75	40	2300X2085X845

HC 103



- EES**
- SDS**
- P-LCS**
- LAS**

HC103 E1

kg	9020*	2260	1590
m	1,00	4,17	5,98



HC103 E2

kg	9132*	2190	1520	1160	820	605
m	1,00	4,17	5,98	7,79	9,82	11,85

HC103 E3

kg	8650*	2035	1375	1030	815	610	430
m	1,00	4,25	6,06	7,87	9,82	11,85	14,00

HC103 E4

kg	8105*	1885	1245	910	705	580	425	355
m	1,00	4,33	6,14	7,95	9,90	11,85	14,00	16,18

HC103 E5

kg	7766*	1765	1150	825	625	500	415	330
m	1,00	4,40	6,21	8,02	9,97	11,92	14,00	16,18

*) Theoretical lifting capacity

HC 103



- EES** Extra Extension Speed
- SDS** Smooth Descent System
- P-LCS** Proportional Lift Control System
- LAS** Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC103 E1	9,5	9,3	425	20	4	350	1215	75	40	2290X2085X800
HC103 E2	-	10,9	425	20	4	350	1305	75	40	2290X2085X800
HC103 E3	-	13,1	425	20	4	347	1395	75	40	2300X2085X800
HC103 E4	-	15,1	425	20	4	340	1480	75	40	2300X2085X800
HC103 E5	-	17,3	425	20	4	336	1555	75	40	2300X2085X845

HC 111

EES
SDS
LAS



HC111 E1

kg	10215*	2450	1705
m	1,00	4,17	5,98

HC111 E2

kg	9880*	2370	1620	1225	880	640
m	1,00	4,17	5,98	7,79	9,82	11,85

HC111 E3

kg	9435*	2220	1490	1110	880	640	460
m	1,00	4,25	6,06	7,87	9,82	11,85	14,00

HC111 E4

kg	9045*	2090	1375	1005	780	640	460	370
m	1,00	4,33	6,14	7,95	9,90	11,85	14,00	16,19

HC111 E5

kg	8755*	1990	1290	925	695	560	465	370
m	1,00	4,40	6,21	8,02	9,97	11,92	14,00	16,19

*) Theoretical lifting capacity

HC 111



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	
HC111 E1	10,2	9,5	425	20	4	315	1155	75	40	2290X2085X800
HC111 E2	-	11,3	425	20	4	315	1265	75	40	2290X2085X800
HC111 E3	-	13,3	425	20	4	315	1370	75	40	2300X2085X800
HC111 E4	-	15,4	425	20	4	315	1465	75	40	2300X2085X800
HC111 E5	-	17,5	425	20	4	315	1555	75	40	2300X2085X845

HC 111K



HC111K E2

kg	9590*	2665	1875	1370
m	1,00	3,60	5,04	6,85



HC111K E3

kg	9285*	2530	1760	1265	975
m	1,00	3,65	5,11	6,92	8,87

*) Theoretical lifting capacity

HC 111K



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC111K E2	9,5	10,3	425	20	4	315	1230	75	40	2273x2108x837
HC111K E3	-	12,4	425	20	4	315	1340	75	40	2273x2108x837

HC 121

- EES**
- SDS**
- LCS**
- LAS**



HC121 E1

kg	10800*	2590	1800
m	1,00	4,17	5,98

HC121 E2

kg	10465*	2510	1710	1305	955	695
m	1,00	4,17	5,98	7,79	9,82	11,85

HC121 E3

kg	10155*	2390	1310	1205	955	695	500
m	1,00	4,25	6,06	7,87	9,82	11,85	14,00

HC121 E4

kg	9675*	2235	1480	1090	845	695	500	405
m	1,00	4,33	6,14	7,95	9,90	11,85	14,00	16,19

HC121 E5

kg	9215*	2095	2095	1365	985	745	500	405
m	1,00	4,40	6,21	8,02	9,97	11,92	14,00	16,19

*) Theoretical lifting capacity

HC 121



- EES** Extra Extension Speed
- SDS** Smooth Descent System
- LCS** Lift Control System
- LAS** Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC121 E1	10,8	9,5	425	20	4	335	1155	75	40	2290X2085X800
HC121 E2	-	11,3	425	20	4	335	1265	75	40	2290X2085X800
HC121 E3	-	13,3	425	20	4	335	1370	75	40	2300X2085X800
HC121 E4	-	15,4	425	20	4	335	1465	75	40	2300X2085X800
HC121 E5	-	17,5	425	20	4	335	1555	75	40	2300X2085X845

HC 125



- EES**
- SDS**
- P-LCS**
- LAS**

HC125 E1

kg	11505*	2760	1920
m	1,00	4,17	5,98



HC125 E2

kg	11175*	2680	1830	1395	995	715
m	1,00	4,17	5,98	7,79	9,82	11,85

HC125 E3

kg	10580*	2490	1680	1260	995	715	525
m	1,00	4,25	6,06	7,87	9,82	11,85	14,00

HC125 E4

kg	9935*	2295	1525	1120	870	715	525	430
m	1,00	4,33	6,14	7,95	9,90	11,85	14,00	16,19

HC125 E5

kg	9570*	2175	1425	1030	780	630	525	430
m	1,00	4,40	6,21	8,02	9,97	11,92	14,00	16,19

*) Theoretical lifting capacity

HC 125




- EES** Extra Extension Speed
- SDS** Smooth Descent System
- P-LCS** Proportional Lift Control System
- LAS** Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC125 E1	8,9	8,0	425	20	4	350	1215	75	40	2290X2085X800
HC125 E2	-	9,8	425	20	4	350	1305	75	40	2290X2085X800
HC125 E3	-	11,9	425	20	4	350	1395	75	40	2300X2085X800
HC125 E4	-	13,9	425	20	4	350	1480	75	40	2300X2085X800
HC125 E5	-	16,1	425	20	4	350	1555	75	40	2300X2085X845

HC 131

EES
SDS
LAS

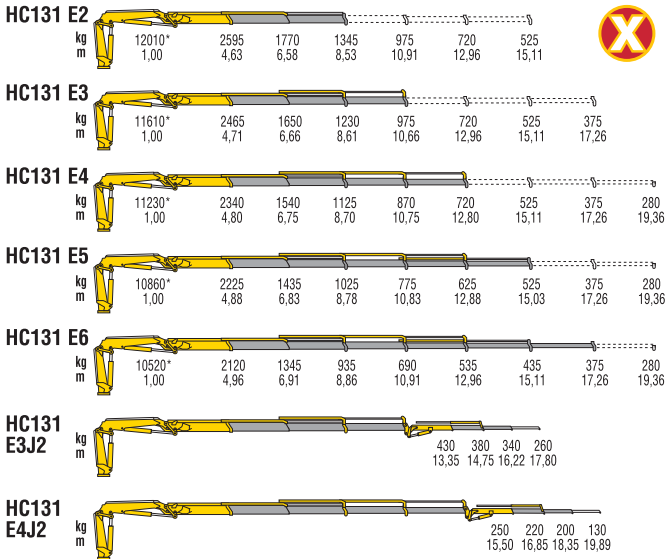

*) Theoretical lifting capacity

HC 131



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC131 E2	12,0	12,2	425	20	4	290	1610	130	30	2450x2330x825
HC131 E3	-	14,4	425	20	4	290	1725	130	30	2450x2330x825
HC131 E4	-	16,5	425	20	4	290	1830	130	30	2450x2330x825
HC131 E5	-	18,7	425	20	4	290	1930	130	30	2450x2330x895
HC131 E6	-	21,0	425	20	4	290	2020	130	30	2450x2330x895
HC131 E3J2	-	19,9	425	20	3	290	2125	130	30	2450x2450x940
HC131 E4J2	-	22,0	425	20	3	290	2230	130	30	2475x2497x940

HC 131K

- EES**
- SDS**
- LAS**



HC131K E2

kg	12520*	3210	2310	1700
m	1,00	3,90	5,30	7,10



HC131K E3

kg	12170*	3080	2200	1600	1250
m	1,00	3,95	5,38	7,20	9,15

*) Theoretical lifting capacity

HC 131 K



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC131K E2	12,5	10,9	425	20	4	300	1525	130	40	2455x2330x825
HC131K E3	-	12,9	425	20	4	300	1625	130	40	2455x2330x825

HC 143

- EES**
- SDS**
- LCS**
- LAS**



HC143 E2										
kg	12390*	2675	1840	1415	1045	780	575			
m	1,00	4,63	6,58	8,53	10,91	12,96	15,11			
HC143 E3										
kg	11940*	2535	1720	1295	1045	780	575	420		
m	1,00	4,71	6,66	8,61	10,66	12,96	15,11	17,26		
HC143 E4										
kg	11570*	2410	1605	1185	930	780	575	420	320	
m	1,00	4,80	6,75	8,70	10,75	12,80	15,11	17,26	19,36	
HC143 E5										
kg	11180*	2290	1500	1080	830	675	575	420	320	
m	1,00	4,88	6,83	8,78	10,83	12,88	15,03	17,26	19,36	
HC143 E6										
kg	10840*	2185	1405	990	740	585	480	420	320	
m	1,00	4,96	6,91	8,86	10,91	12,96	15,11	17,26	19,36	
HC143 E3J2										
kg						465	420	380	290	
m						13,35	14,75	16,22	17,80	
HC143 E4J2										
kg							290	250	230	160
m							15,50	16,85	18,35	19,89

*) Theoretical lifting capacity

HC 143



- EES** Extra Extension Speed
- SDS** Smooth Descent System
- LCS** Lift Control System
- LAS** Liftröd Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC143 E2	12,4	12,2	425	20	4	305	1610	130	30	2450x2330x825
HC143 E3	-	14,4	425	20	4	305	1725	130	30	2450x2330x825
HC143 E4	-	16,5	425	20	4	305	1830	130	30	2450x2330x825
HC143 E5	-	18,7	425	20	4	305	1930	130	30	2450x2330x895
HC143 E6	-	21,0	425	20	4	305	2020	130	30	2450x2330x895
HC143 E3J2	-	19,9	425	20	3	305	2125	130	30	2450x2450x940
HC143 E4J2	-	22,0	425	20	3	305	2230	130	30	2475x2497x940

HC 153

- EES**
- SDS**
- P-LCS**
- LAS**



HC153X E2

kg	13940*	3010	2060	1570	1160	870	655		
m	1,00	4,63	6,58	8,53	10,91	12,96	15,11		

HC153X E3

kg	13520*	2870	1940	1455	1160	870	655	485	
m	1,00	4,71	6,66	8,61	10,66	12,96	15,11	17,26	

HC153X E4

kg	13150*	2740	1825	1345	1050	870	655	485	395
m	1,00	4,80	6,75	8,70	10,75	12,80	15,11	17,26	19,36

HC153X E5

kg	12760*	2615	1720	1245	955	775	655	485	395
m	1,00	4,88	6,83	8,78	10,83	12,88	15,03	17,26	19,36

HC153X E6

kg	12420*	2505	1625	1155	865	685	565	485	395
m	1,00	4,96	6,91	8,86	10,91	12,96	15,11	17,26	19,36

HC153X E3J2

kg						615	560	500	350
m						13,35	14,75	16,22	17,80

HC153X E4J2

kg							420	380	340	200
m							15,50	16,85	18,35	19,89

*) Theoretical lifting capacity

HC 153 X




EES Extra Extension Speed
SDS Smooth Descent System
P-LCS Proportional Lift Control System
LAS Liftrud Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC153X E2	13,9	12,2	425	20	4	325	1610	130	60	2450x2330x825
HC153X E3	-	14,4	425	20	4	325	1725	130	60	2450x2330x825
HC153X E4	-	16,5	425	20	4	325	1830	130	60	2450x2330x825
HC153X E5	-	18,7	425	20	4	325	1930	130	60	2450x2330x895
HC153X E6	-	21,0	425	20	4	325	2020	130	60	2450x2330x895
HC153X E3J2	-	19,9	425	20	3	325	2125	130	60	2450x2450x940
HC153X E4J2	-	22,0	425	20	3	325	2230	130	60	2475x2497x940

HC 161



EES
SDS
LAS

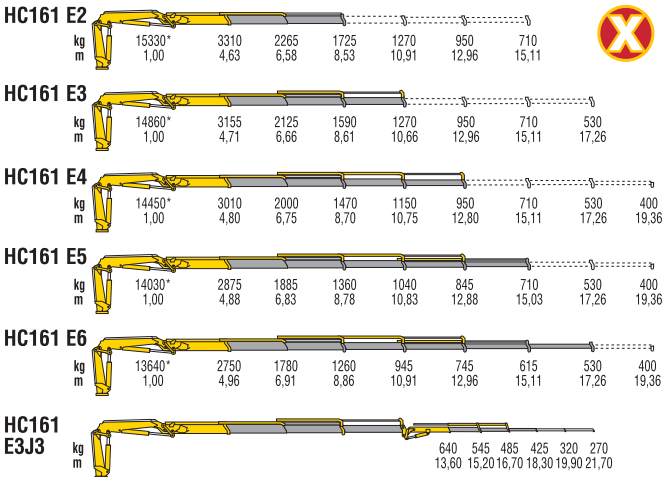

*) Theoretical lifting capacity

HC 161



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC161 E2	15,3	12,2	425	20	4	300	1740	130	40	2475x2330x825
HC161 E3	-	14,4	425	20	4	300	1870	130	40	2475x2330x825
HC161 E4	-	16,5	425	20	4	300	1990	130	40	2475x2330x825
HC161 E5	-	18,7	425	20	4	300	2100	130	40	2475x2330x905
HC161 E6	-	21,0	425	20	4	300	2195	130	40	2475x2330x905
HC161 E3J3	-	21,9	425	20	3	315	2360	130	40	2475x2615x957

HC 161K



HC161K E2

kg	15440*	4010	1940	2115
m	1,00	3,85	5,18	7,13



HC161K E3

kg	15050*	3860	2805	1990	1530
m	1,00	3,90	5,23	7,18	9,23

*) Theoretical lifting capacity

HC 161K



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC161K E2	15,4	10,9	425	20	4	300	1630	130	40	2455x2330x825
HC161K E3	-	12,9	425	20	4	300	1755	130	40	2455x2330x825

HC 173

- EES**
- SDS**
- LCS**
- LAS**



HC173 E2		
kg	15720*	
m	1,00	3395 2345 1810 1350 1025 780
		4,63 6,58 8,53 10,91 12,96 15,11
HC173 E3		
kg	15260*	
m	1,00	3240 2205 1670 1350 1025 780 585
		4,71 6,66 8,61 10,66 12,96 15,11 17,26
HC173 E4		
kg	14830*	
m	1,00	3090 2075 1545 1225 1025 780 585 450
		4,80 6,75 8,70 10,75 12,80 15,11 17,26 19,36
HC173 E5		
kg	14420*	
m	1,00	2955 1955 1430 1110 910 780 585 450
		4,88 6,83 8,78 10,83 12,88 15,03 17,26 19,36
HC173 E6		
kg	14040*	
m	1,00	2830 1845 1325 1005 805 675 585 450
		4,96 6,91 8,86 10,91 12,96 15,11 17,26 19,36
HC173 E3J3		
kg		700 605 560 475 370 310
m		13,60 15,20 16,70 18,30 19,90 21,70

*) Theoretical lifting capacity

HC 173



- EES** Extra Extension Speed
- SDS** Smooth Descent System
- LCS** Lift Control System
- LAS** Liftrrod Articulating System


MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC173 E2	15,7	12,2	425	20	4	310	1745	130	40	2475x2330x825
HC173 E3	-	14,4	425	20	4	310	1875	130	40	2475x2330x825
HC173 E4	-	16,5	425	20	4	310	1995	130	40	2475x2330x825
HC173 E5	-	18,7	425	20	4	310	2105	130	40	2475x2330x905
HC173 E6	-	21,0	425	20	4	310	2200	130	40	2475x2330x905
HC173 E3J3	-	21,9	425	20	3	330	2365	130	40	2475x2615x957

HC 183


EES
SDS
P-LCS
LAS




HC183X E2




HC183X E3




HC183X E4




HC183X E5



HC183X E6



HC183X E3J3



*) Theoretical lifting capacity

HC 183



- EES** Extra Extension Speed
- SDS** Smooth Descent System
- P-LCS** Proportional Lift Control System
- LAS** Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC183X E2	17,3	12,2	425	20	4	330	1745	130	60	2475x2330x825
HC183X E3	-	14,4	425	20	4	330	1875	130	60	2475x2330x825
HC183X E4	-	16,5	425	20	4	330	1995	130	60	2475x2330x825
HC183X E5	-	18,7	425	20	4	330	2105	130	60	2475x2330x905
HC183X E6	-	21,0	425	20	4	330	2200	130	60	2475x2330x905
HC183X E3J3	-	21,9	425	20	3	340	2365	130	60	2475x2615x957

HC 213

EES
SDS
LAS



HC213 E2

kg	19810*	4555	3075	2325
m	1,00	4,35	6,32	8,29



HC213 E3

kg	18745*	4310	2840	2120	1670	1115	940	725
m	1,00	4,35	6,32	8,29	10,36	12,51	14,73	17,01

HC213 E4

kg	18160*	4100	2685	1960	1525	1255	940	725	600
m	1,00	4,43	6,40	8,37	10,44	12,51	14,72	17,01	19,11

HC213 E5

kg	17585*	3900	2525	1815	1385	1120	945	725	600
m	1,00	4,51	6,48	8,45	10,52	12,59	14,72	17,01	19,11

HC213 E6

kg	17225*	3745	2405	1810	1345	1050	845	730	600
m	1,00	4,60	6,57	8,54	10,61	12,68	14,81	17,01	19,11

HC213 E3J3

kg					710	600	520	465
m					13,36	15,06	16,81	18,56

HC213 E4J3

kg						575	505	450	410
m						15,43	16,99	18,55	20,11

HC213 E5J2

kg							525	480	445
m							17,41	18,79	20,27

*) Theoretical lifting capacity

HC 213



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC213 E2	19,8	12,0	415	20	4	345	2210	130	70	2500x2300x930
HC213 E3	-	14,1	415	20	4	345	2360	130	70	2500x2300x930
HC213 E4	-	16,2	415	20	4	345	2510	130	70	2500x2300x930
HC213 E5	-	18,4	415	20	4	345	2630	130	70	2500x2300x930
HC213 E6	-	20,7	415	20	4	345	2725	130	70	2500x2300x930
HC213 E3J3	-	22,2	415	20	3	345	3020	130	70	2500x2300x930
HC213 E4J3	-	23,8	415	20	3	345	3000	130	70	2500x2300x930
HC213 E5J2	-	23,9	415	20	3	345	2905	130	70	2500x2300x930

HC 213K

EES
SDS
LAS



HC213K E2

kg	18690*	5280	3815	2715
m	1,00	3,54	4,87	6,82



HC213K E3

kg	17675*	4870	3380	2455	1880
m	1,00	3,63	4,96	6,91	8,96

HC213K E4

kg	17315*	4680	3340	2320	1750	1410
m	1,00	3,70	5,03	6,98	9,03	11,08

*) Theoretical lifting capacity

HC 213K



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
HC213K E2	18,7	10,5	415	20	4	300	2085	130	70	2475x2300x870
HC213K E3	-	12,7	415	20	4	300	2220	130	70	2475x2300x870
HC213K E4	-	14,8	415	20	4	300	2340	130	70	2475x2300x870

HC 223



- EES**
- SDS**
- LCS**
- LAS**

HC223 E2

kg	20705*	4760	3245	2475
m	1,00	4,35	6,32	8,29

HC223 E3

kg	20180*	4640	3110	2310	1870	1240	1065	725
m	1,00	4,35	6,32	8,29	10,36	12,51	14,73	17,01

HC223 E4

kg	19580*	4420	2970	2140	1700	1395	1065	835	600
m	1,00	4,43	6,40	8,37	10,44	12,51	14,72	17,01	19,11

HC223 E5

kg	19300*	4280	2730	2020	1545	1250	1070	840	705
m	1,00	4,51	6,48	8,45	10,52	12,59	14,72	17,01	19,11

HC223 E6

kg	18860*	4100	2615	1910	1485	1180	1000	840	705
m	1,00	4,60	6,57	8,54	10,61	12,68	14,81	17,01	19,11

HC223 E3J3

kg					775	660	580	525
m					13,36	15,06	16,81	18,56

HC223 E4J3

kg						635	565	510	470
m						15,43	16,99	18,55	20,11

HC223 E5J2

kg							590	540	510
m							17,41	18,79	20,27

*) Theoretical lifting capacity

HC 223




- EES** Extra Extension Speed
- SDS** Smooth Descent System
- LCS** Lift Control System
- LAS** Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC223 E2	20,7	12,0	415	20	4	345	2210	130	70	2500x2300x930
HC223 E3	-	14,1	415	20	4	345	2360	130	70	2500x2300x930
HC223 E4	-	16,2	415	20	4	345	2510	130	70	2500x2300x930
HC223 E5	-	18,4	415	20	4	345	2630	130	70	2500x2300x930
HC223 E6	-	20,7	415	20	4	345	2725	130	70	2500x2300x930
HC223 E3J3	-	22,2	415	20	3	345	3020	130	70	2500x2300x930
HC223 E4J3	-	23,8	415	20	3	345	3000	130	70	2500x2300x930
HC223 E5J2	-	23,9	415	20	3	345	2905	130	70	2500x2300x930

HC 231

- EES**
- SDS**
- P-LCS**
- LAS**

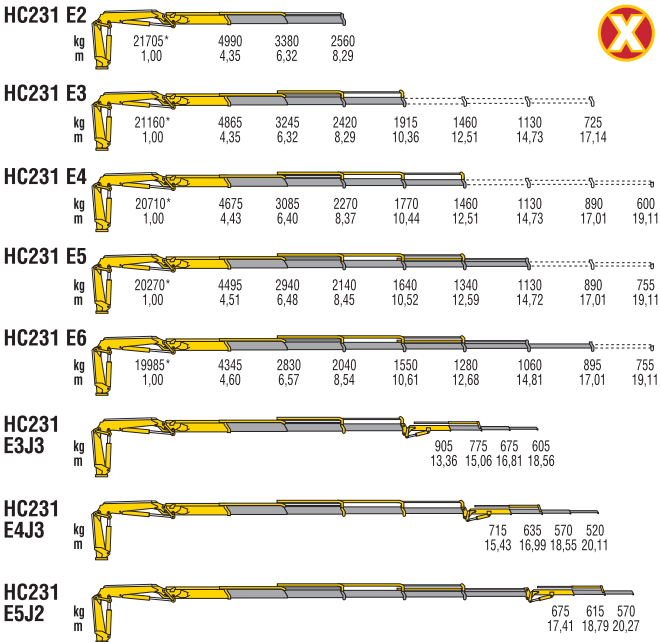

*) Theoretical lifting capacity

HC 231 X












EES Extra Extension Speed
SDS Smooth Descent System
P-LCS Proportional Lift Control System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC231 E2	21,7	12,0	415	20	4	345	2210	130	70	2500x2300x930
HC231 E3	-	14,1	415	20	4	345	2360	130	70	2500x2300x930
HC231 E4	-	16,2	415	20	4	345	2510	130	70	2500x2300x930
HC231 E5	-	18,4	415	20	4	345	2630	130	70	2500x2300x930
HC231 E6	-	20,7	415	20	4	345	2725	130	70	2500x2300x930
HC231 E3J3	-	22,2	415	20	3	-	3020	130	70	2500x2300x930
HC231 E4J3	-	23,8	415	20	3	-	3000	130	70	2500x2300x930
HC231 E5J2	-	23,9	415	20	3	-	2905	130	70	2500x2300x930

HC 235e



EES
SDS
P-LCS
LAS

HC235e E2		
kg	21705*	4990 3380 2560
m	1,00	4,35 6,32 8,29
HC235e E3		
kg	21160*	4865 3245 2420 1915 1460 1130 725
m	1,00	4,35 6,32 8,29 10,36 12,51 14,73 17,01
HC235e E4		
kg	20710*	4675 3085 2270 1770 1460 1130 890 600
m	1,00	4,43 6,40 8,37 10,44 12,51 14,72 17,01 19,11
HC235e E5		
kg	20270*	4495 2940 2140 1640 1340 1130 890 755
m	1,00	4,51 6,48 8,45 10,52 12,59 14,72 17,01 19,11
HC235e E6		
kg	19985*	4345 2830 2040 1550 1280 1060 895 755
m	1,00	4,60 6,57 8,54 10,61 12,68 14,81 17,01 19,11
HC235e E3J3		
kg		905 775 675 605
m		13,36 15,06 16,81 18,56
HC235e E4J3		
kg		715 635 570 520
m		15,43 16,99 18,55 20,11
HC235e E5J2		
kg		675 615 570
m		17,41 18,79 20,27

*) Theoretical lifting capacity

HC 235e



EES Extra Extension Speed
SDS Smooth Descent System
P-LCS Proportional Lift Control System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC235e E2	21,7	12,0	Endless	30	4	345	2370	130	70	2535x2685x960
HC235e E3	-	14,1	Endless	30	4	345	2520	130	70	2535x2685x960
HC235e E4	-	16,2	Endless	30	4	345	2670	130	70	2535x2685x960
HC235e E5	-	18,4	Endless	30	4	345	2790	130	70	2535x2685x960
HC235e E6	-	20,7	Endless	30	4	345	2885	130	70	2535x2685x960
HC235e E3J3	-	22,2	Endless	30	3	-	3180	130	70	2575x2685x1095
HC235e E4J3	-	23,8	Endless	30	3	-	3160	130	70	2630x2685x1095
HC235e E5J2	-	23,9	Endless	30	3	-	3065	130	70	2530x2685x1095

HC 243

EES
SDS
LAS



HC243 E2

kg		5265	3595	2730
m	1,00	4,28	6,18	8,08



HC243 E3

kg		5175	3495	2625	2080	1600	1300	1000
m	1,00	4,28	6,18	8,08	10,11	12,22	14,44	16,65

HC243 E4

kg		4885	3270	2425	1895	1565	1240	1000	605
m	1,00	4,36	6,26	8,33	10,19	12,22	14,44	16,65	18,90

HC243 E5

kg		4610	3055	2235	1720	1400	1180	900	750	535
m	1,00	4,44	6,34	8,24	10,27	12,30	14,43	16,65	18,90	21,18

HC243 E6

kg		4430	2910	2105	1595	1275	1055	905	605	535
m	1,00	4,53	6,43	8,33	10,36	12,39	14,52	16,65	18,90	21,18

HC243 E7

kg		4270	2780	1985	1480	1160	940	795	695	570	350
m	1,00	4,61	6,51	8,41	10,44	12,47	14,60	16,73	18,90	21,18	23,28

HC243 E8

kg		4130	2670	1890	1390	1070	850	705	605	535	450
m	1,00	4,70	6,60	8,50	10,53	12,56	14,69	16,82	18,98	21,18	23,28

HC243 E4J3

kg						660	570	500	450	375	315
m						15,21	16,91	18,66	20,41	22,30	24,21

HC243 E5J3

kg							530	475	430	400	345	300
m							17,26	18,82	20,38	21,94	23,60	25,38

HC243 E6J2

kg								540	500	460
m								19,38	20,76	22,24

*) Theoretical lifting capacity

HC 243



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC243 E2	22,5	11,7	415	20	4	315	2315	130	80	2500x2300x935
HC243 E3	-	13,8	415	20	4	310	2455	130	80	2500x2300x935
HC243 E4	-	15,9	415	20	4	310	2595	130	80	2500x2300x935
HC243 E5	-	18,1	415	20	4	310	2720	130	80	2500x2300x935
HC243 E6	-	20,3	415	20	4	310	2825	130	80	2500x2300x935
HC243 E7	-	22,5	415	20	4	310	2945	130	80	2500x2300x1005
HC243 E8	-	24,8	415	20	4	310	3035	130	80	2500x2300x1005
HC243 E4J3	-	24,1	415	20	4	325	3255	130	80	2520x2715x1055
HC243 E5J3	-	25,6	415	20	4	330	3210	130	80	2500x2615x1055
HC243 E6J2	-	25,9	415	20	4	325	3100	130	80	2500x2605x1055

HC 243K



HC243K E2

kg	22715*	6090	4455	3190
m	1,00	3,72	5,06	7,03



HC243K E3

kg	21875*	5865	4255	3010	2305
m	1,00	3,73	5,06	7,03	9,10

HC243K E4

kg	21145*	5550	4005	2800	2115	1710
m	1,00	3,81	5,14	7,11	9,18	11,25

*) Theoretical lifting capacity

HC 243K



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC243K E2	22,7	10,7	415	20	4	300	2245	130	80	2520x2300x930
HC243K E3	-	12,8	415	20	4	300	2385	130	80	2520x2300x930
HC243K E4	-	14,9	415	20	4	300	2525	130	80	2520x2300x930

HC 245

- EES**
- SDS**
- LCS**
- LAS**



HC245 E2

kg	23510*	5435	3770	2910
m	1,00	4,28	6,18	8,08



HC245 E3

kg	22855*	5340	3665	2795	2255	1765	1455	1000
m	1,00	4,28	6,18	8,08	10,11	12,22	14,44	16,65

HC245 E4

kg	21995*	5045	3430	2585	2055	1725	1390	1140	605
m	1,00	4,36	6,26	8,33	10,19	12,22	14,44	16,65	18,90

HC245 E5

kg	21155*	4765	3210	2385	1870	1545	1320	1025	870	535
m	1,00	4,44	6,34	8,24	10,27	12,30	14,43	16,65	18,90	21,18

HC245 E6

kg	20770*	4585	3060	2250	1730	1405	1180	1035	700	630
m	1,00	4,53	6,43	8,33	10,36	12,39	14,52	16,65	18,90	21,18

HC245 E7

kg	20350*	4415	2920	2120	1610	1280	1050	905	805	670	420
m	1,00	4,61	6,51	8,41	10,44	12,47	14,60	16,73	18,90	21,18	23,28

HC245 E8

kg	20115*	4280	2810	2020	1510	1185	960	805	700	630	540
m	1,00	4,70	6,60	8,50	10,53	12,56	14,69	16,82	18,98	21,18	23,28

HC245 E4J3

kg						730	640	565	515	435	370
m						15,21	16,91	18,66	20,41	22,30	24,21

HC245 E5J3

kg								600	540	495	465	405	355
m								17,26	18,82	20,38	21,94	23,60	25,38

HC245 E6J2

kg										570	530	490
m										19,38	20,76	22,24

*) Theoretical lifting capacity

HC 245



- EES** Extra Extension Speed
SDS Smooth Descent System
LCS Lift Control System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC245 E2	23,3	11,7	415	20	4	330	2315	130	80	2500x2300x935
HC245 E3	-	13,8	415	20	4	330	2455	130	80	2500x2300x935
HC245 E4	-	15,9	415	20	4	330	2595	130	80	2500x2300x935
HC245 E5	-	18,1	415	20	4	330	2720	130	80	2500x2300x935
HC245 E6	-	20,3	415	20	4	330	2825	130	80	2500x2300x935
HC245 E7	-	22,5	415	20	4	330	2945	130	80	2500x2300x1005
HC245 E8	-	24,8	415	20	4	330	3035	130	80	2500x2300x1005
HC245 E4J3	-	24,1	415	20	4	330	3255	130	80	2520x2715x1055
HC245 E5J3	-	25,6	415	20	4	330	3210	130	80	2500x2615x1055
HC245 E6J2	-	25,9	415	20	4	330	3100	130	80	2500x2605x1055

HC 261

EES
SDS
P-LCS
LAS



HC261 E2

kg	24800*	5795	3965	3015
m	1,00	4,28	6,18	8,08



HC261 E3

kg	24310*	5680	3850	2895	2300	1845	1500	1000
m	1,00	4,28	6,18	8,08	10,11	12,22	14,44	16,65

HC261 E4

kg	23780*	5455	3670	2735	2145	1775	1430	1175	605
m	1,00	4,36	6,26	8,33	10,19	12,22	14,44	16,65	18,90

HC261 E5

kg	23350*	5260	3515	2595	2010	1640	1385	1145	960	535
m	1,00	4,44	6,34	8,24	10,27	12,30	14,43	16,65	18,90	21,18

HC261 E6

kg	22965*	5070	3365	2460	1880	1510	1260	1085	765	680
m	1,00	4,53	6,43	8,33	10,36	12,39	14,52	16,65	18,90	21,18

HC261 E7

kg	22345*	4910	3240	2345	1770	1405	1150	980	855	725	630
m	1,00	4,61	6,51	8,41	10,44	12,47	14,60	16,73	18,90	21,18	23,28

HC261 E8

kg	22345*	4755	3120	2240	1670	1310	1060	885	765	680	580
m	1,00	4,70	6,60	8,50	10,53	12,56	14,69	16,82	18,98	21,18	23,28

HC261 E4J3

kg						855	745	660	595	510	435
m						15,21	16,91	18,66	20,41	22,30	24,21

HC261 E5J3

kg							695	625	570	525	465	415
m							17,26	18,82	20,38	21,94	23,60	25,38

HC261 E6J2

kg								650	600	560
m								19,38	20,76	22,24

*) Theoretical lifting capacity

HC 261 X














EES Extra Extension Speed
SDS Smooth Descent System
P-LCS Proportional Lift Control System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC261 E2	24,8	11,7	415	20	4	345	2315	130	80	2500x2300x935
HC261 E3	-	13,8	415	20	4	345	2455	130	80	2500x2300x935
HC261 E4	-	15,9	415	20	4	345	2595	130	80	2500x2300x935
HC261 E5	-	18,1	415	20	4	345	2720	130	80	2500x2300x935
HC261 E6	-	20,3	415	20	4	345	2825	130	80	2500x2300x935
HC261 E7	-	22,5	415	20	4	345	2945	130	80	2500x2300x1005
HC261 E8	-	24,8	415	20	4	345	3035	130	80	2500x2300x1005
HC261 E4J3	-	24,1	415	20	4	355	3255	130	80	2520x2715x1055
HC261 E5J3	-	25,6	415	20	4	350	3210	130	80	2500x2615x1055
HC261 E6J2	-	25,9	415	20	4	350	3100	130	80	2500x2605x1055

HC 265e

- EES**
- SDS**
- P-LCS**
- LAS**



HC265e E2												
kg	24800*	5795	3965	3015								
m	1,00	4,28	6,18	8,08								
HC265e E3												
kg	24310*	5680	3850	2895	2300	1845	1500	1000				
m	1,00	4,28	6,18	8,08	10,11	12,22	14,44	16,65				
HC265e E4												
kg	23780*	5455	3670	2735	2145	1775	1430	1175	605			
m	1,00	4,36	6,26	8,33	10,19	12,22	14,44	16,65	18,90			
HC265e E5												
kg	23350*	5260	3515	2595	2010	1640	1385	1145	960	535		
m	1,00	4,44	6,34	8,24	10,27	12,30	14,43	16,56	18,90	21,18		
HC265e E6												
kg	22965*	5070	3365	2460	1880	1510	1260	1085	765	680		
m	1,00	4,53	6,43	8,33	10,36	12,39	14,52	16,65	18,90	21,18		
HC265e E7												
kg	22635*	4910	3240	2345	1770	1405	1150	980	855	725	630	
m	1,00	4,61	6,51	8,41	10,44	12,47	14,60	16,73	18,90	21,18	23,28	
HC265e E8												
kg	22345*	4755	3120	2240	1670	1310	1060	885	765	680	580	
m	1,00	4,70	6,60	8,50	10,53	12,56	14,69	16,82	18,98	21,18	23,28	
HC265e E4J3												
kg						855	745	660	595	510	435	
m						15,08	16,78	18,53	20,28	22,08	24,01	
HC265e E5J3												
kg							695	625	570	525	465	415
m							17,26	18,82	20,38	21,94	23,60	25,38
HC265e E6J2												
kg								650	600	560		
m								19,38	20,76	22,24		

*) Theoretical lifting capacity

HC 265e



- EES Extra Extension Speed**
- SDS Smooth Descent System**
- P-LCS Proportional Lift Control System**
- LAS Liftrod Articulating System**

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	
HC265e E2	24,8	11,7	Endless	30	4	345	2460	130	80	2530x2335x980
HC265e E3	-	13,8	Endless	30	4	345	2600	130	80	2530x2335x980
HC265e E4	-	15,9	Endless	30	4	345	2740	130	80	2530x2335x980
HC265e E5	-	18,1	Endless	30	4	345	2865	130	80	2530x2335x980
HC265e E6	-	20,3	Endless	30	4	345	2970	130	80	2530x2335x980
HC265e E7	-	22,5	Endless	30	4	345	3090	130	80	2530x2335x1055
HC265e E8	-	24,8	Endless	30	4	345	3180	130	80	2530x2335x1055
HC265e E4J3	-	24,1	Endless	30	3	355	3400	130	80	2575x2700x1100
HC265e E5J3	-	25,6	Endless	30	3	355	3355	130	80	2550x2595x1100
HC265e E6J2	-	25,9	Endless	30	3	355	3245	130	80	2540x2580x1100

HC 291



EES Extra Extension Speed

SDS Smooth Descent System

LCS Lift Control System

LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC291 E2	27,3	11,9	425	22	4	325	2635	180	50	2510x2350x1010
HC291 E3	-	13,8	425	22	4	325	2795	180	50	2510x2350x1010
HC291 E4	-	15,8	425	22	4	325	2950	180	50	2510x2350x1010
HC291 E5	-	17,9	425	22	4	325	3090	180	50	2510x2350x1040
HC291 E6	-	20,1	425	22	4	325	3215	180	50	2510x2350x1060
HC291 E7	-	22,4	425	22	4	325	3330	180	50	2510x2350x1160
HC291 E8	-	24,7	425	22	4	325	3430	180	50	2510x2350x1180
HC291 E6J4	-	29,1	425	22	4	325	3790	180	50	2510x2705x1190

HC 331

EES

SDS

LAS



HC331 E1

kg	31220*	11930**	7770	5430	3900	2815	2115		
m	1,00	2,52	3,98	5,75	7,55	9,60	11,69		



HC331 E2

kg	30290*	11625**	7610	5170	3900	2815	2115	1600	
m	1,00	2,52	3,98	5,75	7,60	9,60	11,69	13,98	

HC331 E3

kg	29600*	11320**	7400	5015	3715	2895	2115	1600	1220
m	1,00	2,52	4,00	5,75	7,60	9,60	11,70	14,00	16,30

HC331 E4

kg	29010*	11010**	7075	4765	3495	2680	2195	1600	1220	960
m	1,00	2,52	4,10	5,85	7,70	9,70	11,70	14,00	16,30	18,65

HC331 E5

kg	28500*	10705**	6785	4555	3320	2510	2020	1680	1220	960	785
m	1,00	2,52	4,20	5,95	7,80	9,80	11,80	14,00	16,30	18,65	20,75

HC331 E6

kg	27800*	10450**	6540	4335	3125	2345	1860	1520	1295	960	785
m	1,00	2,52	4,25	6,10	7,90	9,90	11,90	14,10	16,30	18,65	20,75

HC331 E7

kg	27210*	10195**	6185	4125	2970	2200	1715	1375	1150	1005	785
m	1,00	2,52	4,40	6,20	8,10	10,10	12,10	14,30	16,50	18,65	20,75

HC331 E8

kg	26780*	10145**	5950	3920	2785	2035	1585	1255	1035	885	785	400
m	1,00	2,52	4,50	6,30	8,20	10,20	12,20	14,40	16,60	18,80	20,95	23,40

HC331 E4J4

kg									1090	940	815	695	605	420
m									14,60	16,30	18,10	19,80	21,60	23,40

HC331 E5J4

kg										705	605	525	460	420	330
m										16,80	18,50	20,20	22,00	23,80	25,70

*) Theoretical lifting capacity
 **) Fixed hook capacity

HC 331



EES Extra Extension Speed
SDS Smooth Descent System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	
HC331 E1	31,2	9,9	397	25	4	300	3050	160	45	2540x2355x1170
HC331 E2	-	11,8	397	25	4	300	3280	160	45	2540x2355x1170
HC331 E3	-	13,8	397	25	4	300	3500	160	45	2540x2355x1170
HC331 E4	-	15,8	397	25	4	300	3730	160	45	2540x2355x1170
HC331 E5	-	18,1	397	25	4	300	3900	160	45	2540x2355x1170
HC331 E6	-	20,4	397	25	4	300	4060	160	45	2540x2405x1170
HC331 E7	-	22,7	397	25	4	300	4180	160	45	2540x2490x1300
HC331 E8	-	25,0	397	25	4	300	4300	160	45	2540x2550x1300
HC331 E4J4	-	25,7	397	30	4	290	4570	160	45	2540x2620x1330
HC331 E5J4	-	28,0	397	30	4	290	4740	160	45	2545x2620x1330

HC 361



- EES** Extra Extension Speed
SDS Smooth Descent System
LCS Lift Control System
LAS Liftrød Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC361 E1	32,4	9,9	397	25	4	310	3050	160	45	2540x2355x1170
HC361 E2	-	11,8	397	25	4	310	3280	160	45	2540x2355x1170
HC361 E3	-	13,8	397	25	4	310	3500	160	45	2540x2355x1170
HC361 E4	-	15,8	397	25	4	310	3730	160	45	2540x2355x1170
HC361 E5	-	18,1	397	25	4	310	3900	160	45	2540x2355x1170
HC361 E6	-	20,4	397	25	4	310	4060	160	45	2540x2405x1170
HC361 E7	-	22,7	397	25	4	310	4180	160	45	2540x2490x1300
HC361 E8	-	25,0	397	25	4	310	4300	160	45	2540x2550x1300
HC361 E4J4	-	25,7	397	30	4	310	4570	160	45	2540x2620x1330
HC361 E5J4	-	28,0	397	30	4	310	4740	160	45	2545x2620x1330

HC 501



EES Extra Extension Speed

SDS Smooth Descent System

TCU Total Control Unit

LCS Lift Control System

LAS Liftrod Articulating System


MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC501X E2	45,0	12,1	400	25	4	315	4040	210	80	2505x2460x1275
HC501X E3	-	14,1	400	25	4	315	4290	210	80	2505x2460x1275
HC501X E4	-	16,1	400	25	4	315	4570	210	80	2505x2460x1275
HC501X E5	-	18,2	400	25	4	315	4810	210	80	2505x2460x1285
HC501X E6	-	20,3	400	25	4	315	5010	210	80	2505x2460x1285
HC501X E7	-	22,5	400	25	4	315	5200	210	80	2505x2460x1400
HC501X E8	-	24,7	400	25	4	315	5380	210	80	2510x2480x1400
HC501X E6J4	-	30,1	400	25	4	315	5880	210	80	2515x2725x1470

HC 601e


- EES**
- SDS**
- LCS**
- LAS**




**HC601e
E2**




**HC601e
E4**



**HC601e
E6**



**HC601e
E8**



Jib versions also available

HC 601e



- EES** Extra Extension Speed
- SDS** Smooth Descent System
- LCS** Proportional Lift Control System
- LAS** Liftrod Articulating System

READY TO
ORDER
06-2019

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS mm B x h x S
	tm	m	°	s/180°	°	bar	kg	l	l/min	
HC601e E2	57,5	11,9	Endless	20	4	335	4450	250	100	2530x2430x1480
HC601e E4	-	15,9	Endless	20	4	335	5030	250	100	2530x2430x1480
HC601e E6	-	20,3	Endless	20	4	335	5570	250	100	2530x2430x1480
HC601e E8	-	24,7	Endless	20	4	335	6000	300	100	2550x2430x1635

HC 661e

- EES**
- SDS**
- P-LCS**
- LAS**



**HC661e
E2**

kg	14270	10170	7910
m	4,35	6,15	8,00



**HC661e
E4**

kg	13500	9540	7325	5860	4900	3615	3130	2365	2110
m	4,46	6,26	8,06	10,00	11,96	14,08	16,18	18,52	20,70

**HC661e
E6**

kg	12850	8910	6720	5265	4315	3615	3130	2365	2110	1700	1350
m	4,48	6,28	8,10	10,05	11,98	14,08	16,18	18,52	20,70	22,85	25,00

**HC661e
E8**

kg	12050	8330	6230	4810	3880	3195	2715	2365	2110	1700	1350
m	4,67	6,47	8,30	10,25	12,20	14,30	16,40	18,52	20,70	22,85	25,00

Jib versions also available

HC 661e



EES Extra Extension Speed
SDS Smooth Descent System
P-LCS Proportional Lift Control System
LAS Liftrod Articulating System

READY TO
ORDER
06-2019

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS mm B x h x S
	tm	m	°	s/180°	°	bar	kg	l	l/min	
HC661e E2	63,2	11,9	Endless	20	4	335	4450	250	100	2530x2430x1480
HC661e E4	-	15,9	Endless	20	4	335	5030	250	100	2530x2430x1480
HC661e E6	-	20,3	Endless	20	4	335	5570	250	100	2530x2430x1480
HC661e E8	-	24,7	Endless	20	4	335	6000	300	100	2550x2430x1635

HC 801



- EES** Extra Extension Speed
SDS Smooth Descent System
TCU Total Control Unit
LCS Lift Control System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	
HC801X E2	74,0	12,1	Endless	40	4	315	6350	280	100	2530x2450x1610
HC801X E4	-	16,0	Endless	40	4	315	7000	280	100	2530x2450x1610
HC801X E6	-	20,2	Endless	50	4	315	7600	280	100	2530x2450x1770
HC801X E8	-	24,1	Endless	50	4	315	8150	280	100	2530x2505x1795
HC801X E10	-	28,7	Endless	60	4	315	8550	280	100	2530x2635x1795
HC801X E6J6	-	33,6	Endless	60	4	315	9100	280	100	2530x2800x1900
HC801X E8J4	-	34,0	Endless	60	4	315	9000	280	100	2545x2875x1900

HC 951



EES Extra Extension Speed
LCS Proportional Lift Control System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	
HC951 E4	81,3	15,3	Endless	21	5	345	8300	300	80	2550x2474x2180
HC951 E5	-	17,3	Endless	21	5	345	8720	300	80	2550x2474x2180
HC951 E6	-	19,3	Endless	21	5	345	9050	300	80	2550x2474x2180
HC951 E7	-	21,6	Endless	21	5	345	9360	300	80	2550x2474x2180
HC951 E8	-	23,4	Endless	21	5	345	9520	300	80	2550x2474x2180
HC951 E9	-	25,8	Endless	21	5	345	9700	300	80	2550x2474x2180
HC951 E6J4	-	27,5	Endless	21	5	345	9840	300	80	2550x2474x2180
HC951 E8J6	-	36,1	Endless	21	5	345	10425	300	80	2550x2474x2180

HC 1151

EES
LCS
LAS



HC1151 E4

kg	22050	16250	12500	10000	8430
m	4,20	5,75	7,41	9,18	10,91



HC1151 E6

kg	20900	15200	11700	9400	7800	6600	5660
m	4,36	5,90	7,55	9,27	11,1	12,97	15,1

HC1151 E8

kg	19400	14100	10800	8500	7000	5700	4900	4300	3760
m	4,52	6,10	7,72	9,47	11,22	13,28	15,2	17,15	19,52


HC1151 E10

kg	18900	13550	10250	8100	6600	5250	4265	3575	3050	2680	2400
m	4,60	6,20	7,80	9,55	11,3	13,35	15,3	17,25	19,6	21,7	23,8

HC1151 E8J6

kg										1840	1670	1530	1340	1050	850	720
m										22,5	23,9	25,5	27,2	29,0	30,9	32,8

*) Theoretical lifting capacity

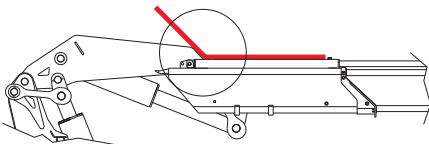

Second boom with negative angle in order to simplify operations in difficult access conditions

HC 1151



EES Extra Extension Speed

LCS Proportional Lift Control System

LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC1151 E4	93,4	15,3	Endless	34	5	345	8640	300	120	2540x2660x2300
HC1151 E6	-	19,5	Endless	34	5	345	9300	300	120	2540x2670x2300
HC1151 E8	-	23,9	Endless	34	5	335	9750	300	120	2550x2670x2300
HC1151 E10	-	28,1	Endless	34	5	335	10200	300	120	2550x2790x2300
HC1151 E8J6	-	36,9	Endless	34	5	335	10645	300	120	2560x2670x2300

HC 1651



EES Extra Extension Speed
P-LCS Proportional Lift Control System
LAS Liftrod Articulating System

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HC1651 E4	119	15,5	Endless	70	5	345	12750	640	100+50	2550x2595x3600
HC1651 E6	-	19,3	Endless	70	5	345	13425	640	100+50	2550x2595x3600
HC1651 E8	-	23,0	Endless	70	5	345	13975	640	100+50	2550x2595x3600
HC1651 E9	-	25,1	Endless	70	5	345	14660	640	100+50	2550x2595x3600
HC1651 E8J6	-	36,5	Endless	70	5	345	16200	640	100+50	2550x2595x3600
HC1651 E8J7	-	37,6	Endless	70	5	345	16400	640	100+50	2550x2595x3600
HC1651 E9J7	-	39,8	Endless	70	5	345	16260	640	100+50	2550x2595x3600



HV

HV 27

HV 47

HV 77

HV 107

HV 147

HV 197


HV 227

When looking for a compact articulated crane, simple to operate, with high lifting capacity, HV line is the perfect solution for cost and performance


HV 27



HV27 E2



HV27 E3



*) Theoretical lifting capacity


MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HV27 E2	2,60	7,93	370	13	4	205	330	17,5	10	1900x1635x352
HV27 E3	-	9,19	370	13	4	205	360	17,5	10	1900x1635x352

HV 47




HV47 E1

kg	4300*	2150*	1325	965	705
m	1,00	2,00	3,23	4,44	5,75




HV47 E2

kg	4170*	2085*	1250	900	705	540
m	1,00	2,00	3,33	4,54	5,75	7,06



HV47 E3

kg	4060*	2030*	1180	845	650	540	425
m	1,00	2,00	3,43	4,64	5,85	7,06	8,37



*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HV47 E1	4,30	7,22	380	16	4	270	565	48	14	2155x1955x420
HV47 E2	-	8,51	380	16	4	270	615	48	14	2155x1955x420
HV47 E3	-	9,81	380	16	4	270	660	48	14	2155x1955x420

HV 77



HV77 E1

kg	7550*	3775*	2195	1560	1140
m	1,00	2,00	3,43	4,79	6,23

HV77 E2

kg	7340*	3670*	2085	1470	1140	870
m	1,00	2,00	3,51	4,87	6,23	7,66

HV77 E3

kg	7130*	3565*	1990	1405	1080	870	665
m	1,00	2,00	3,58	4,94	6,30	7,66	9,05

*) Theoretical lifting capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HV77 E1	7,55	7,81	380	16	4	250	770	48	16	2320x2030x565
HV77 E2	-	9,22	380	16	4	250	830	48	16	2320x2030x565
HV77 E3	-	10,64	380	16	4	250	890	48	16	2320x2030x565

HV 107



HV107 E1

kg	9560*	3915**	2425	1720	1230
m	1,00	2,42	3,91	5,56	7,35

HV107 E2

kg	9180*	3770**	2300	1605	1230	895
m	1,00	2,42	3,99	5,64	7,34	9,22

HV107 E3

kg	8880*	3670**	2170	1485	1120	895	675
m	1,00	2,42	4,08	5,73	7,43	9,22	11,17

*) Theoretical lifting capacity
 **) Fixed hook capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HV107 E1	9,56	9,30	380	15	4	275	1030	100	25	2490X2320X635
HV107 E2	-	11,08	380	15	4	275	1130	100	25	2490X2320X635
HV107 E3	-	12,95	380	15	4	275	1220	100	25	2490X2320X690

HV 147



HV147 E1

kg	13870*	5820**	3455	2485	1815
m	1,00	2,34	3,93	5,58	7,36

HV147 E2

kg	13360*	5655**	3295	2355	1815	1380
m	1,00	2,34	4,01	5,66	7,36	9,23

HV147 E3

kg	12930*	5525**	3160	2250	1715	1380	1015
m	1,00	2,34	4,08	5,73	7,43	9,23	11,14

*) Theoretical lifting capacity

**) Fixed hook capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HV147 E1	13,9	9,54	380	15	4	285	1375	100	25	2500X2455X820
HV147 E2	-	11,3	380	15	4	285	1490	100	25	2500X2455X820
HV147 E3	-	13,1	380	15	4	285	1595	100	25	2500X2455X820

HV 197



HV197 E1

kg	19110*	7965**	4715	3395	2510
m	1,00	2,33	3,98	5,63	7,41

HV197 E2

kg	18600*	7765**	4520	3240	2510	1915
m	1,00	2,33	4,06	5,71	7,41	9,28

HV197 E3

kg	17940*	7610**	4345	3100	2380	1915	1510
m	1,00	2,33	4,13	5,78	7,48	9,28	11,15

*) Theoretical lifting capacity

**) Fixed hook capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HV197 E1	19,1	9,35	380	15	4	295	1715	150	40	2500X2475X920
HV197 E2	-	11,0	380	15	4	295	1850	150	40	2500X2475X920
HV197 E3	-	12,8	380	15	4	295	1975	150	40	2500X2475X920

HV 227

LCS



HV227 E1

kg	20520*	8490**	5035	3645	2710
m	1,00	2,33	3,98	5,63	7,41

HV227 E2

kg	20080*	8460**	4835	3485	2710	2075
m	1,00	2,33	4,06	5,71	7,41	9,28

HV227 E3

kg	19370*	8315**	4670	3330	2570	2075	1640
m	1,00	2,33	4,13	5,78	7,48	9,28	11,15

*) Theoretical lifting capacity

**) Fixed hook capacity

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT STABILIZERS	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HV227 E1	20,5	9,35	380	15	4	315	1745	150	40	2500X2475X945
HV227 E2	-	11,05	380	15	4	315	1880	150	40	2500X2475X945
HV227 E3	-	12,84	380	15	4	315	2005	150	40	2500X2475X945





MAN BASKET


HA50 MB
HA70 MB

Telescopic cranes with self-aligning
basket


MAN BASKET



Thanks to the special "self-aligning" balancing system, the position of the basket is always horizontal without any intervention from the user.

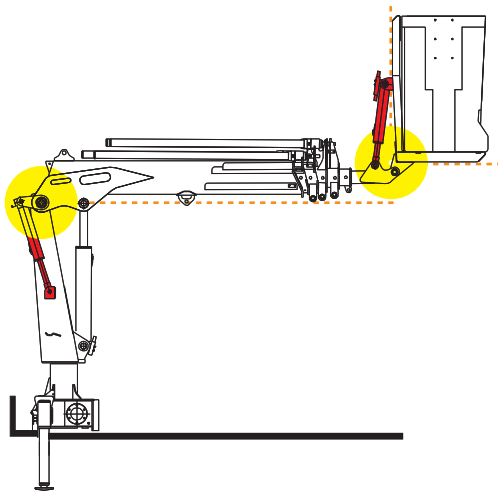

MAN BASKET

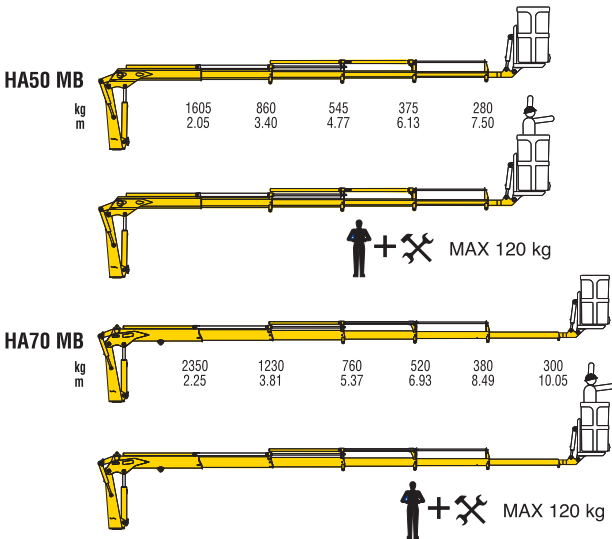

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT (STAB. STANDARD)	OIL TANK CAPACITY	OIL FLOW	DIMENSIONS
	tm	m	°	s/180°	°	bar	kg	l	l/min	mm B x h x S
HA50 MB	3,29	13,30	380	-	4	220	940	35	15	3305x1940x850
HA70 MB	5,29	16,00	387	-	4	220	1260	35	18	3765x2080x850



FFB

HB 10 FFB

HB 15 FFB

HB 50 FFB

HB 50S FFB

SPECIALIZED CRANES FOR AGRICULTURAL TRACTORS

Uniquely engineered to support advanced applications in the agricultural industry, the FFB line boosts the productivity and efficiency while enhancing the speeds and safety of harvesting activities.



Easy and Safe



Easy to use and maintain

All the greasing point are in a easy to access position.



Cable controls

Connection by cable controls allow an easy installation and a higher safety for the driver.

4 functions control valve by Walvoil



7 functions control valve by Hidrocontrol



Strong and reliable




Structural design in accordance with: EN12999



Quality ISO9001: 2008 certified

Production from the raw metal to the crane ready to be installed is controlled by quality procedures certified by Lloyd's register according to ISO9001.



Long life painting

Painting process is made to allow the best quality possible and ensure a long crane life in all the applications and environments.

- A - Iron grid sandblasting
- B - Cathodic electrodeposition paint
- C - Yellow polyester powder paint




Hexagonal boom

The use of this technology brings superior performance, reduced maintenance, and less adjustment.

Strong and reliable

Rack and Pinion heavy duty slewing




Double rack and pinion heavy duty slewing

The use of two racks spread the force across twice as many teeth on the pinion. Slewing has more strength for difficult situations.

Internal extension cylinder



Floating device

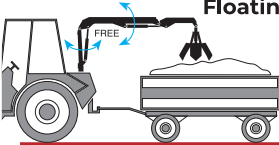

Full packages



3 Jaws grab

Self weight: 35 kg
Capacity: 50 dm³



4 jaws grab

Self weight: 75 kg
Capacity: 100 dm³



box grab

Special attachment for bulk material




Oil tank

Steel oil tank made to be installed on the back of the tractor including oil filter and level indicators.







HB10S FFB




HB10 FFB



HB15 FFB



HB50S FFB



HB50 FFB



Ⓜ Manual extension (weight kg 10)

MODELS	LIFTING MOMENT	MAX VERTICAL REACH (HYDR)	SLEWING ANGLE	SLEWING TIME	MAX WORKING HEEL	WORKING PRESSURE	CRANE WEIGHT WITHOUT MANUAL EXTENSION	OIL TANK CAPACITY	OIL FLOW	RACOMMENDED TRACTOR
	tm	m	°	s/180°	°	bar	kg	l	l/min	hp
HB10S FFB	-	3,1	330	45	10	70	148	25	12	-
HB10 FFB	0,5	3,7	330	4	10	90	166	25	12	25 - 65
HB15 FFB	1,0	3,7	330	4	10	160	166	46	12	25 - 65
HB50S FFB	-	5,7	380	36	4	275	625	35	15	80
HB50 FFB	4,8	6,7	330	10	4	275	675	35	15	-



HZ

HZR L

HZR Z

HZT L

HZT Z

HZR

SPECIALIZED CRANES FOR RECYCLING APPLICATIONS

Designed specifically to meet the needs of recycling applications, the HZR is available in foldable (Z) and non-foldable (L) versions.

With a wide range of models and versions, these cranes are the perfect solution for scrap and container handling from 8 to 25 tm. Offering high-speed performance, it's perfect one-stop solution when combined with Hyva hookloaders and attachments.

HZT

SPECIALIZED CRANES FOR TIMBER APPLICATION


Designed specifically to meet the needs of timber applications, the HZT offers exceptional performance, high flexibility and a wide choice of accessories. With a wide range of models and versions, these cranes are the perfect solution for wood transport from 4 to 27 tm.

Foldable (Z) and non-foldable (L) versions are available.




HZR ZO


HZR080 ZO

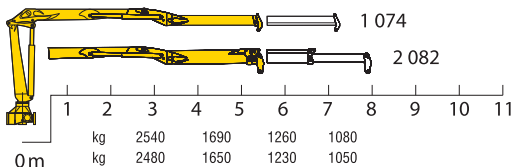


HZR100 ZO

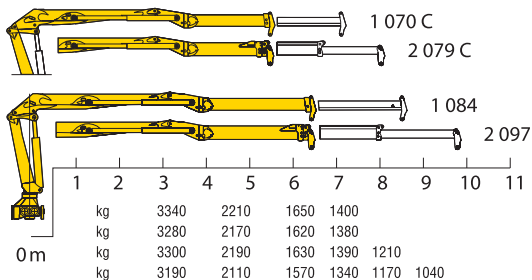

HZR120 ZO

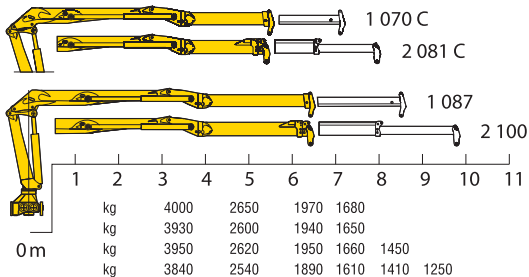


HZR150 ZO

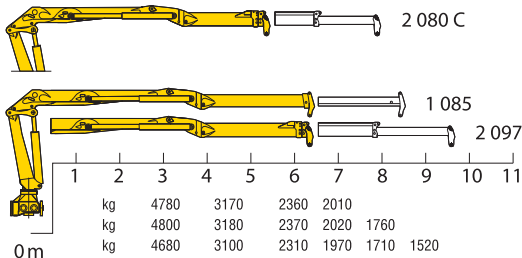


HZR Z0

HZR170 Z0

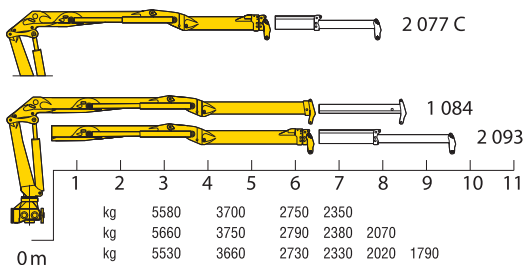

HZR210 Z0

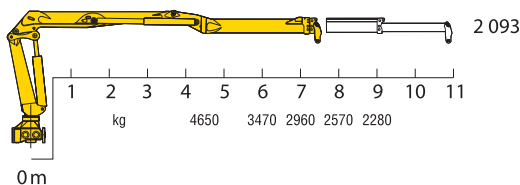


Models	lifting moment (kNm)	Slewing torque (kNm)	Slewing angle (°)	Slewing speed (rpm)	Working pressure (MPa)	Oil flow (l/min)	Crane weight (kg)
HZR080 Z0							
1 074	78	18	420	6	260	70 2x60	1730
2 082	76	18	420	6	260	70 2x60	1820
HZR100 Z0							
1 070 C	100	22	435	6	240	80 2x70	2250
2 079 C	99	22	435	6	240	80 2x70	2310
1 084	99	22	435	6	240	80 2x70	2300
2 097	96	22	435	6	240	80 2x70	2370
HZR120 Z0							
1 070 C	120	25	435	6	240	80 2x70	2360
2 081 C	118	25	435	6	240	80 2x70	2450
1 087	119	25	435	6	240	80 2x70	2440
2 100	116	25	435	6	240	80 2x70	2560
HZR150 Z0							
2 080 C	144	30	435	6	245	90 2x80	2550
1 085	144	30	435	6	245	90 2x80	2540
2 097	141	30	435	6	245	90 2x80	2660
HZR170 Z0							
2 077 C	168	35	435	6	250	2x90	3040
1 084	170	35	435	6	250	2x90	3030
2 093	166	35	435	6	250	2x90	3150
HZR210 Z0							
2 093	210	38	390	6	220	2x90	3210


HZR Z1




HZR100 Z1

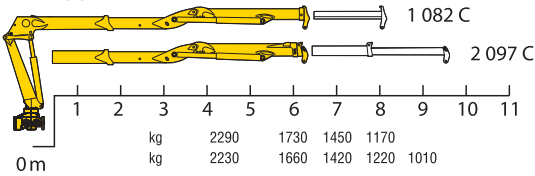

HZR120 Z1


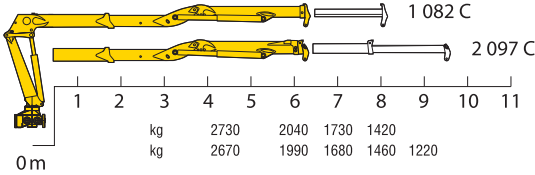


HZR150 Z1

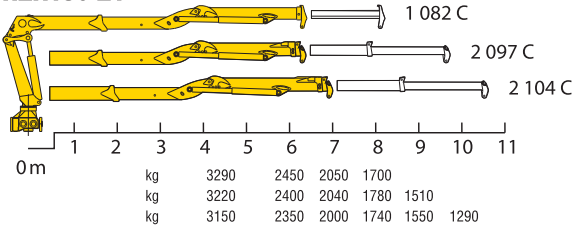

HZR Z1

HZR180 Z1

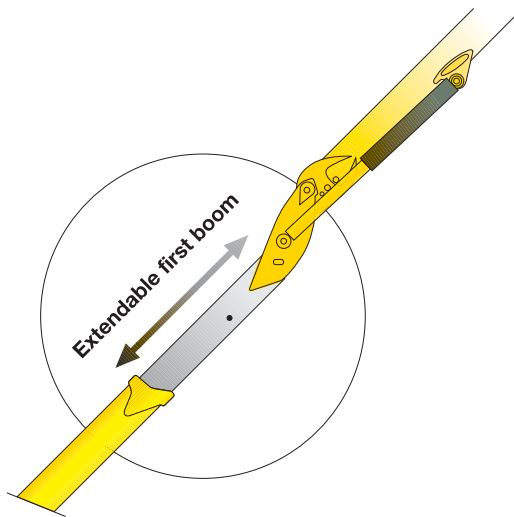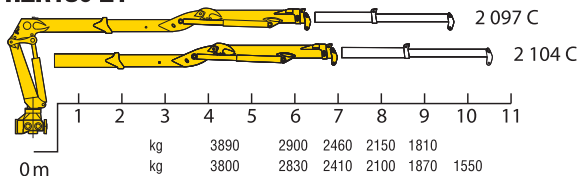


Models	lifting moment (kNm)	Stewing torque (kNm)	Stewing angle (°)	Stewing speed (rpm)	Working pressure (MPa)	Oil flow (l/min)	Crane weight (kg)
HZR100 Z1							
1 082 C	104	28	435	6	235	80 2x70	2350
2 097 C	100	28	435	6	235	80 2x70	2440
HZR120 Z1							
1 082 C	123	30	435	6	255	80 2x70	2390
2 097 C	120	30	435	6	255	80 2x70	2480
HZR150 Z1							
1 082 C	148	32	435	6	245	90 2x80	2690
2 097 C	145	32	435	6	245	90 2x80	2780
2 104 C	142	32	435	6	245	90 2x80	2950
HZR180 Z1							
2 097 C	175	34	435	6	265	90 2x90	2860
2 104 C	171	34	435	6	265	90 2x90	3030






HZR LO


HZR080 LO

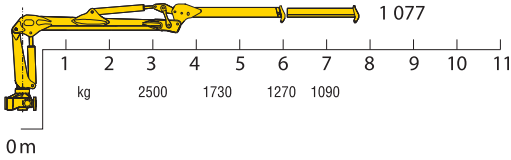


HZR100 LO

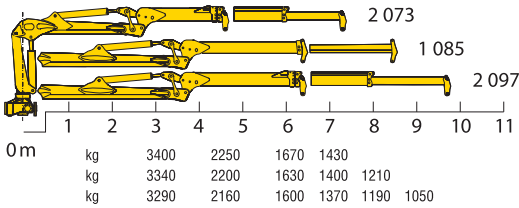

HZR120 LO

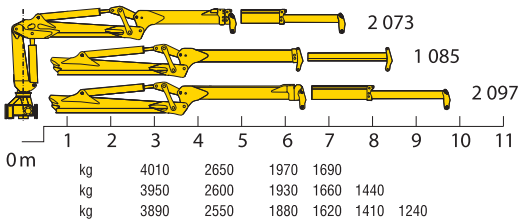


HZR140 LO

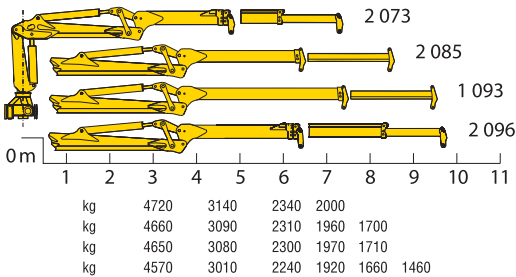






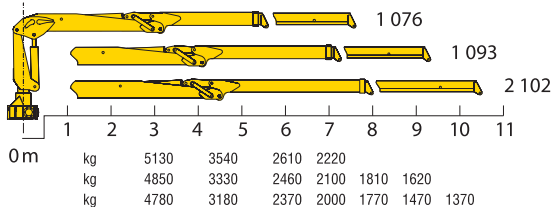


HZR LO

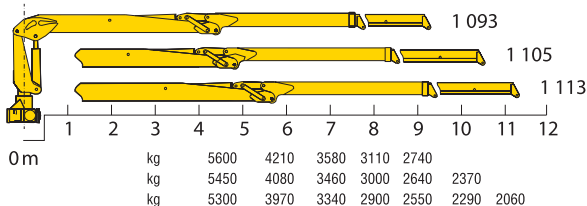HZR160 LO



HZR250 LO




	 lifting moment	 Slewing torque	 Slewing angle	 Slewing speed	 Working pressure	 Oil flow	 Crane weight
Models	(kNm)	(kNm)	(°)	(rpm)	(MPa)	(l/min)	kg
HZR080 LO							
1 077	79	18	430	5	230	70	1550
HZR100 LO							
2 073	102	22	435	5	220	80 2x70	1950
1 085	100	22	435	5	220	80 2x70	2000
2 097	96	22	435	5	220	80 2x70	2090
HZR120 LO							
2 073	122	25	435	5	240	80 2x70	2080
1 085	120	25	435	5	240	80 2x70	2150
2 097	116	25	435	5	240	80 2x70	2220
HZR140 LO							
2 073	142	30	435	5	240	90 2x80	2430
2 085	140	30	435	5	240	90 2x80	2460
1 093	139	30	435	5	240	90 2x80	2520
2 096	135	30	435	5	240	90 2x80	2600
HZR160 LO							
1 076	161	35	435	5	230	2x90	2580
1 093	151	35	435	5	230	2x90	2800
2 102	136	35	435	5	230	2x90	2860
HZR250 LO							
1 093	256	38	435	5	230	2x90	3120
1 105	244	38	435	5	230	2x90	3280
1 113	241	38	435	5	230	2x90	3370


HZR L1




HZR080 L1

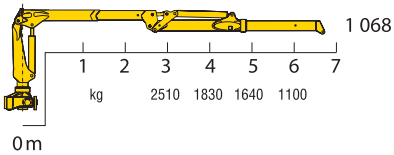

HZR100 L1


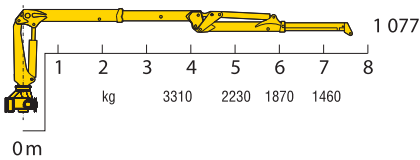


HZR120 L1

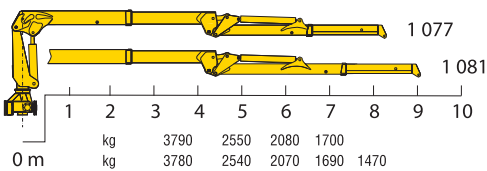

HZR L1

HZR150 L1

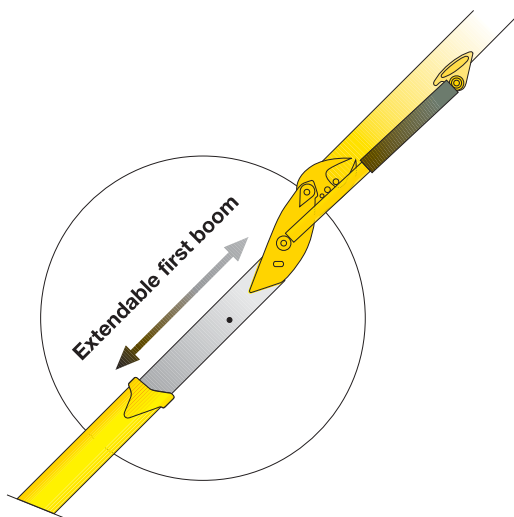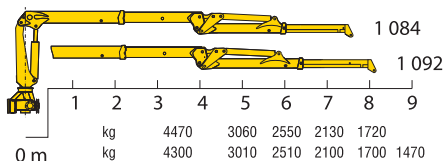


Models	lifting moment (kNm)	Stewing torque (kNm)	Stewing angle (°)	Stewing speed (rpm)	Working pressure (MPa)	Oil flow (l/min)	Crane weight (kg)
HZR080 L1							
1 068	75	18	430	5	220	70	1800
HZR100 L1							
1 077	115	22	435	5	240	80 2x70	2420
HZR120 L1							
1 077	132	25	435	5	250	80 2x70	2480
1 081	132	25	435	5	250	80 2x70	2520
HZR150 L1							
1 084	156	25	435	5	250	90 2x80	2980
1 092	155	25	435	5	250	90 2x80	3130






HZT LO


HZT080 LO

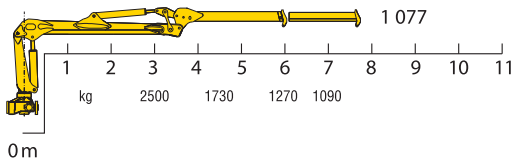


HZT100 LO

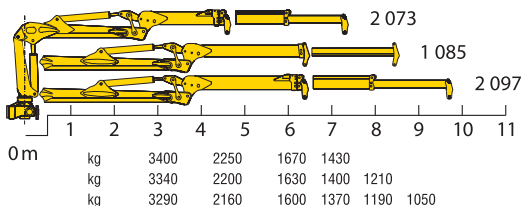

HZT120 LO

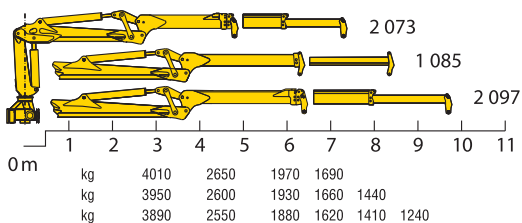


HZT140 LO

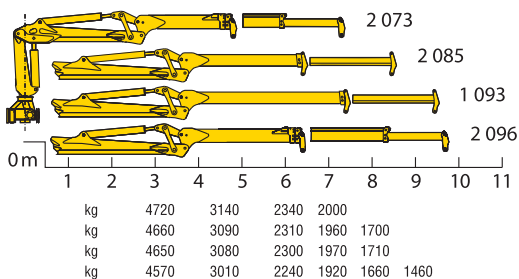


HZT LO

HZT160 LO

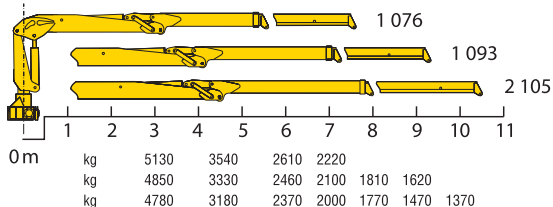

HZT250 LO

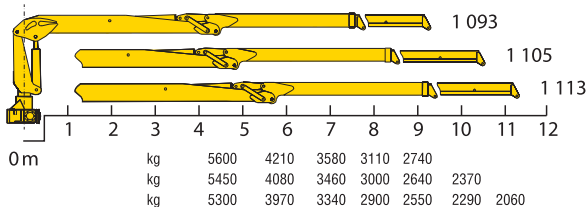


Models	(kNm)	(kNm)	(°)	(rpm)	(MPa)	(l/min)	kg
HZT080 LO							
1 077	79	18	430	5	230	70	1550
HZT100 LO							
2 073	102	22	435	5	220	80 2x70	1950
1 085	100	22	435	5	220	80 2x70	2000
2 097	96	22	435	5	220	80 2x70	2090
HZT120 LO							
2 073	122	25	435	5	240	80 2x70	2080
1 085	120	25	435	5	240	80 2x70	2150
2 097	116	25	435	5	240	80 2x70	2220
HZT140 LO							
2 073	142	30	435	5	240	90 2x80	2430
2 085	140	30	435	5	240	90 2x80	2460
1 093	139	30	435	5	240	90 2x80	2520
2 096	135	30	435	5	240	90 2x80	2600
HZT160 LO							
1 076	161	35	435	5	230	2x90	2580
1 093	151	35	435	5	230	2x90	2800
2 105	136	35	435	5	230	2x90	2860
HZT250 LO							
1 093	256	38	435	5	230	2x90	3120
1 105	244	38	435	5	230	2x90	3280
1 113	241	38	435	5	230	2x90	3370






HZT Z0


HZT040 Z0

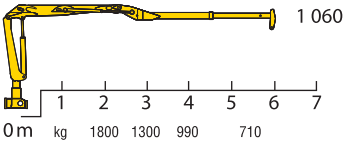


HZT090 Z0

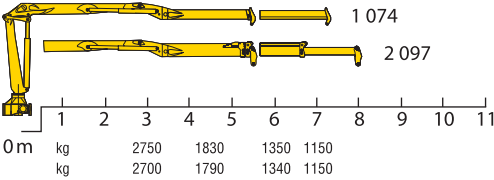


HZT110 Z0

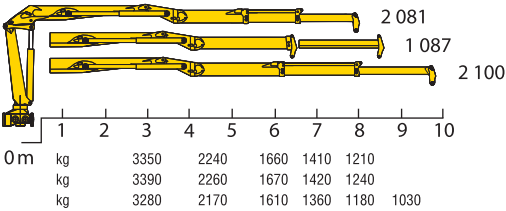

HZT130 Z0

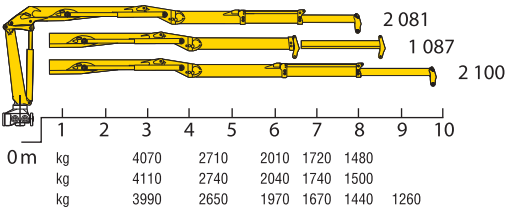


HZT150 Z0

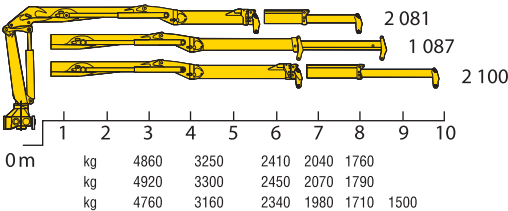


HZT Z0




HZT180 Z0

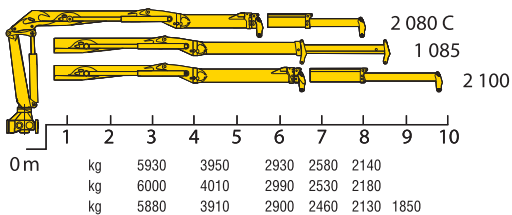

HZT210 Z0

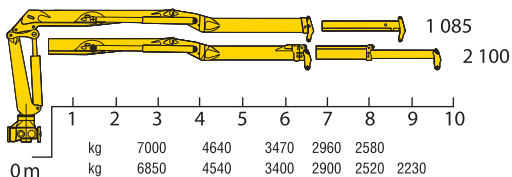



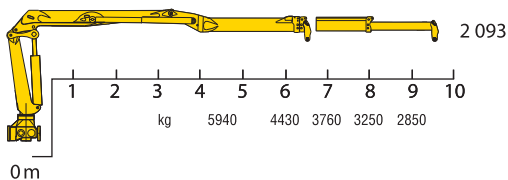




HZT270 Z0



HZT 20



	 Lifting moment	 Slewing torque	 Slewing angle	 Slewing speed	 Working pressure	 Oil flow	 Crane weight
Models	(kNm)	(kNm)	(°)	(rpm)	(MPa)	(l/min)	kg
HZT040							
1 060	39	11	400	6	210	30	950
HZT085							
1 074	83	18	420	6	270	60	1730
2 082	81	18	420	6	270	60	1820
HZT110							
2 081	101	28	435	6	240	70 2x60	2020
1 087	102	28	435	6	240	70 2x60	2040
2 100	99	28	435	6	240	70 2x60	2100
HZT130							
2 081	122	30	435	6	260	80 2x70	2310
1 087	124	30	435	6	260	80 2x70	2300
2 100	120	30	435	6	260	80 2x70	2370
HZT150							
2 081	146	33	435	6	260	90 2x80	2450
1 087	148	33	435	6	260	90 2x80	2540
2 100	143	33	435	6	260	90 2x80	2560
HZT180							
2 080C	178	35	435	6	250	90 2x80	2550
1 085	180	35	435	6	250	90 2x80	2540
2 100	175	35	435	6	250	90 2x80	2680
HZT210							
2 085	210	38	435	5	260	2x90	3030
2 100	206	38	435	5	260	2x90	3150
HZT270							
2 093	267	42	ENDLESS	5	230	2x100	3210





KENNIS

CRANES BY **HYVA**[®]

13 - RL
14 - R
16 - R
R - 24
R - 30
R - 40

The Kennis concept maximizes the haulage payload and increases your productivity.

Fast Operation

Longer Useful Life

Efficient, Simpler & Safer For Users.


Improved Driving Condition

Maximum Payload



HIGH LIFTING CAPACITY AND LOW TARE

The complete Kennis Rolloader concept is the combination of a light crane, light attachment and equally important a light trailer. Kennis Rolloader Cranes are made to perform many cycles at high speed and with exceptional precision. With a lightweight, compact design and a short boom, Kennis cranes can do the same heavy job with a lower load moment (capacity) than a heavy rear mounted crane which will require a long boom. The steel structures of crane and crane equipment have been engineered to perform and endure tough heavy duty load cycles making the crane fast, extremely robust and durable while still very safe to operate.

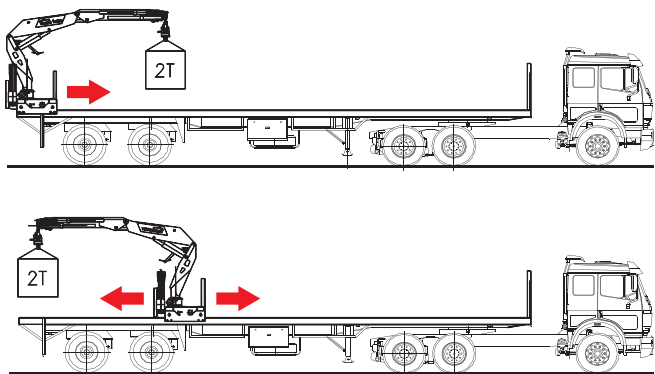

UNRESTRICTED VIEW FROM ITS ERGONOMIC CONTROL

- Better visibility so as to view loading and unloading operations.
- Simple, safe intuitive control.
- Precise and advanced top seat control with levers or four-axis joystick control and foot pedals.
- Ergonomically designed topseat and crane control joysticks improves comfort leading to efficiency, and also increases safety.

RADIO REMOTE CONTROL



Multifunction radio remote control allows the operator to move 2-3-4 or more functions of the crane simultaneously, and to move freely around the trailer and keep control of the load position.

ENVIRONMENTALLY FRIENDLY

- Lower total tare weight so maximum payload is transported.
- Self-propelled crane with its own high performance fuel efficient power unit.
- Variable displacement pump using optimum power resulting in less fuel consumption.



EFFICIENCY

- Faster loading cycle speeds.
- Load/ Unload independently without the use of any other handling equipment on site.
- The crane operation is closer to the load with a shorter boom maximizing the load capacity.
- Self-propelled powered base eliminates the necessity of moving your truck while loading, saving valuable time.
- A precise control of the crane's movement and for accurate placing of the load.
- Easily offload the crane from the trailer.

LONGER USEFUL LIFE

A Kennis crane mounted on the trailer outlasts the useful life far longer than the tractor head truck. Different fleet of tractor heads can also be used for multiple other applications making the operations more flexible as it does not need to have specially fitted hydraulic kits to power the crane.

- Continuous slewing
- Hexagonal boom sections
- Twin high performance lift cylinders

E-Power helps to meet increasingly demanding environmental regulations, with direct tax benefits for the customers in certain countries.



BATTERY PACK AND MOTOR

Electric motors used, feature Kennis integrated electric motors (IEM) and batteries with a new generation of power semiconductors, to achieve best in class efficiency.


CONSTANT TORQUE

Kennis electric motors matches robustness and power by providing the correct torque and constant angular speed to drive the hydraulic pump.

URBAN USE

The electric crane solution is ideal for urban areas and can be operated when the truck engine is switched off.

Kennis e-power cranes lead a pioneering role in the field of electrification and are the latest high-performance innovations, maintaining the best advantages in service and payload.

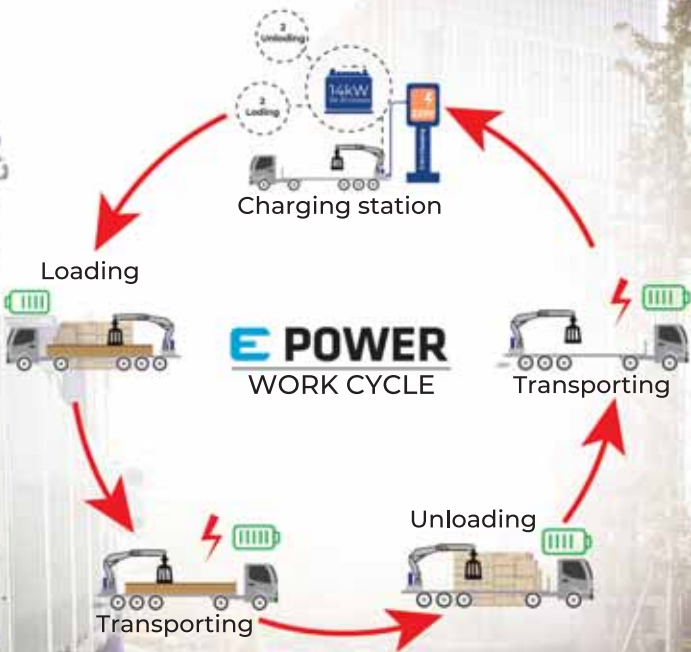

GOING THE EXTRA MILE

Kennis ORRS (On-Road Recharging System). provides energy to recharge service battery from traction battery energy.


FAST RECHARGE

High capacity battery pack, built to deliver maximum energy, without compromising power performances. Battery Management System (BMS) guarantee efficient thermal management, high battery performance and safety.

EFFICIENT ENERGY DISTRIBUTION





High voltage power connection provides for the use of shielded cable with high efficient inner core cross section area.

13-RL

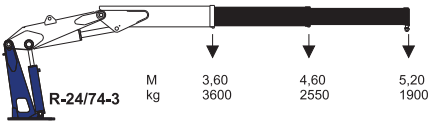




14-R

Available also
E POWER
 versions

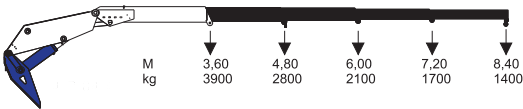
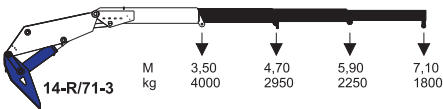
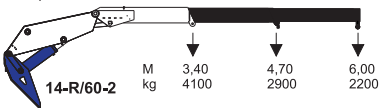
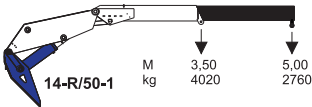


16-R





Available also
E POWER
 versions

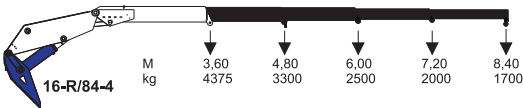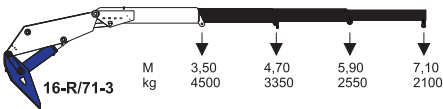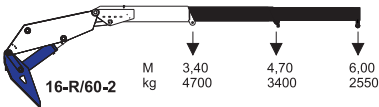





R-24

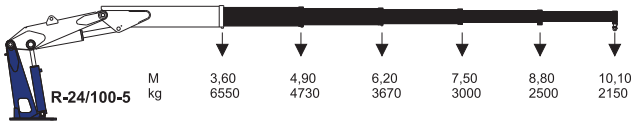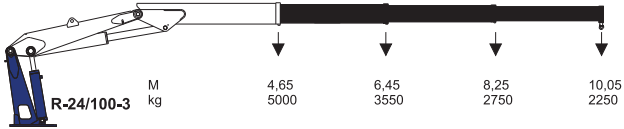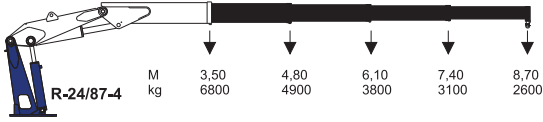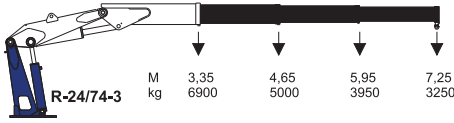

R-30

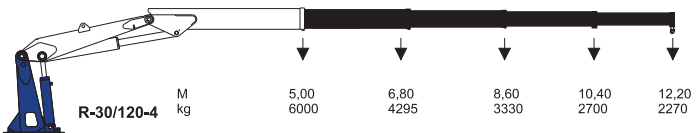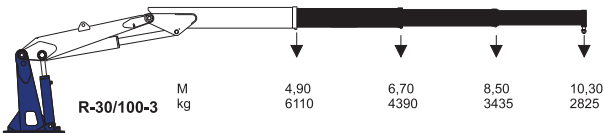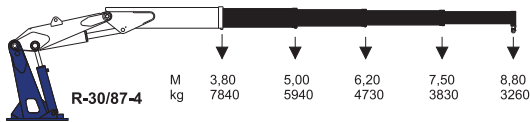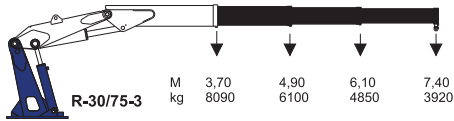

R-40

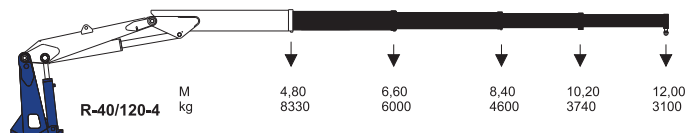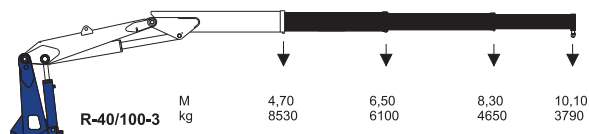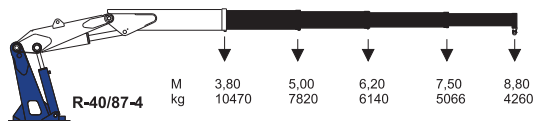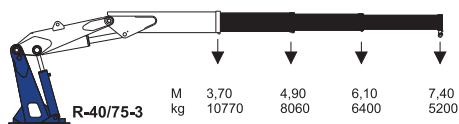

MODELS	LIFTING MOMENT	MAX HYDRAULIC REACH	FOLDABLE	SLEWING ANGLE	HEIGHT	WIDTH	CRANE WEIGHT	LENGTH FOLDED CRANE
	tm	m		°	mm	mm	kg	mm
13-R/62-2	13	6,2	Yes	405	2392	2408	2000	1000
14-R/50-1	14	5,0	Yes	400	2530	2550	2900	1082
14-R/60-2	14	6,0	Yes	400	2440	2550	3000	1082
14-R/71-3	14	7,1	Yes	400	2530	2550	3100	1082
14-R/84-4	14	8,4	Yes	400	2570	2550	3200	1082
16-R/60-2	16	6,0	Yes	400	2440	2550	3100	1082
16-R/71-3	16	7,1	Yes	400	2530	2550	3200	1082
16-R/84-4	16	8,4	Yes	400	2570	2550	3300	1082
R-24/74-3	24	7,3	Yes	'B0	2470	2515	4290	1370
R-24/87-4	24	8,7	Yes	'B0	2550	2515	4450	1370
R-24/100-3	24	10,0	No	'B0	2250	2515	4500	-
R-24/100-5	24	10,1	Yes	'B0	2550	2515	4620	1370
R-30/75-3	30	7,5	Yes	'B0	2470	2515	5400	1590
R-30/87-4	30	8,7	Yes	'B0	2550	2515	5550	1590
R-30/100-3	30	10,3	No	'B0	2300	2515	5750	-
R-30/120-4	30	12,2	No	'B0	2300	2515	6000	-
R-40/75-3	40	8,2	Yes	'B0	2470	2525	6140	1590
R-40/87-4	40	8,8	Yes	'B0	2550	2525	6300	1590
R-40/100-3	40	10,1	No	'B0	2360	2525	6500	-
R-40/120-4	40	12,0	No	'B0	2360	2525	6800	-



Stability control systems (CE)

Models	HS	HM	HML	OPTIONAL HL	HXL	H2XL	H2XL+	H3XL	OPTIONAL H4XL
HA14									
HA10									
HA15	●		✘	✘					
HA21									
HA22	●	●	✘	✘					
HA27									
HA28	●		✘	✘					
HA33	●		✘	✘					
HA50		●	✘	✘					
HA70			✘	✘	●				
HT92									
HT112									
HT130								●	✘
HT162								●	✘
HT212									
HT240									
HB 31									
HB38									
HB40									
HB50		●	✘	✘					
HB60			✘	✘	●				
HB70			✘	✘	●				
HB80					●	✘			
HB90								●	✘
HB 100					●	✘			
HB112								●	✘
HB120					●	✘			
HB130								●	✘
HB150					●	✘			
HB160								●	✘
HB170					●	✘			
HB200					●	✘			
HB210								●	✘
HB230					●	✘			
HB240								●	✘
HB250					●	✘			
HB280					●	✘			
HB460									
HB700									
HB330R									
HB350R									
HB430R									
HB450R									
HB600R									
HB660R									

● Standard ✘ Radio Version

Stability control systems (CE)

Models	HS	HM	HML	OPTIONAL HL	HXL	H2XL	H2XL+	H3XL	OPTIONAL H4XL
HC91								●	⊗
HC91K								●	⊗
HC95								●	⊗
HC103								●	⊗
HC111								●	⊗
HC111K								●	⊗
HC121								●	⊗
HC125								●	⊗
HC131								●	⊗
HC131K								●	⊗
HC143								●	⊗
HC153X								●	⊗
HC161								●	⊗
HC161K								●	⊗
HC173								●	⊗
HC183X								●	⊗
HC213								●	⊗
HC213K								●	⊗
HC223								●	⊗
HC231								●	⊗
HC235e								●	⊗
HC243								●	⊗
HC243K								●	⊗
HC245								●	⊗
HC261								●	⊗
HC265e								●	⊗
HC291						●			
HC331						●			
HC361						●			
HC501X						●			
HC601e								⊗	⊗
HC661e								⊗	⊗
HC801X						●			
HC951							⊗		
HC1151							⊗		
HC1651									
<hr/>									
HV27									
HV47		●							
HV77		●							
HV107		●							
HV147		●							
HV197		●							
HV227		●							

● Standard ⊗ Radio Version

Data, descriptions, and illustrations pertain only and uniquely to models sold at the time of printing of this brochure. After the date of printing, this information is purely indicative and not binding upon HYVA. Future modifications are solely at the discretion of HYVA and are always in compliance with applicable and pertinent safety standards. To obtain updated data, descriptions, and illustrations, contact the manufacturer or your reseller. Cranes manufactured and/or marketed by HYVA. HYVA is not responsible for the special applications depicted. Crane applications and accessories described herein are only examples. Some applications and equipment shown may not be approved for use in CE countries or other areas. It is the installer's responsibility to ensure that the crane is applied correctly, and that its application, installation, and accessories maintain safety and comply with all local laws.

130 countries
2,500 employees
25,000 customers
37 subsidiaries
12 production facilities



Tipping Solutions | Container Handling | Waste Handling | Cranes

Hyva is a leading provider of innovative and highly efficient transport solutions for commercial vehicles used in transport, construction, mining, materials handling and environmental service industries.

Founded in 1979 in the Netherlands, the company has a global presence with 37 fully owned subsidiaries, extraordinary service coverage and 12 manufacturing facilities in Brazil, China, Europe and India.

For more information on Hyva, please visit www.hyva.com

or follow us on:



Quality and
environmental certified

Hyva Holding B.V.

Antonie van Leeuwenhoekweg 37
2408 AK Alphen aan den Rijn
The Netherlands
Telephone: +31 (0)172 - 42 35 55
Telefax: +31 (0)172 - 42 08 80
info@hyva.com
www.hyva.com

DEALER STAMP

Data, descriptions, and illustrations pertain only and uniquely to models sold at the time of printing of this brochure. After the date of printing, this information is purely indicative and not binding upon HYVA. Future modifications are solely at the discretion of HYVA and are always in compliance with applicable and pertinent safety standards. To obtain updated data, descriptions, and illustrations, contact the manufacturer or your reseller. Cranes manufactured and/or marketed by HYVA. HYVA is not responsible for the special applications depicted. Crane applications and accessories described herein are only examples. Some applications and equipment shown may not be approved for use in CE countries or other areas. It is the installer's responsibility to ensure that the crane is applied correctly, and that its application, installation, and accessories maintain safety and comply with all local laws.